



Identification	Type	LCOS-ZB-KL-SS-350-15-12
	Part-No.	780921.002.2
Description	LCOS plug-in terminal 12-pin, pin spacing 3.50 printed 1-12	
Use/Application/Properties	Terminal black, CS 3.50, 12-pole, 1.5 mm ² Push-in, 1-12 printed	
General	Design Plug-in terminal RM 3,50	
Connection device	Screw terminal	
Connection cross-section	AWG 28 – AWG 16	
Connection cross-section	0.08 – 1.5 mm ²	
Housing material	PA 6.6 (UL 94 V-0)	
Colour of the housing	black	
Operating voltage	max. AC/DC 160 V	
Operating current	max. 8 A	
Contact material	CuNiZn	
Over voltage category	III	
Degree of pollution	3	

25.08.2017 – Subject to technical modification

Part-No. 780921.002.2

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk




Technical data sheet - Load monitoring

Pole number	12
Dimensions (w x h x d)	43.8 x 10.2 x 19.3 mm
Weight	0.110 kg/piece
Approvals	UR
PU	10 piece

General ambient conditions

Operation temperature range	-40 °C ... +85 °C
Storage temperature range	-40 °C ... +85 °C
Protection class	IP00

Dimensions

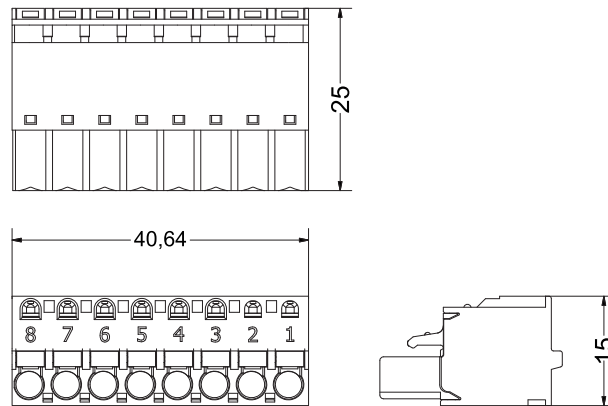

25.08.2017 – Subject to technical modification

Part-No. 780921.002.2

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY