



Identification	Type	LCOS-ZB-KL-SS-508-25-8
	Part-No.	780922.002.2
Description	LCOS plug-in terminal 8-pin, pin spacing 5.08 printed 1-8	
Use/Application/Properties	Terminal strip pluggable, RM 5, 4-pole, 2,5 mm ² spring terminal, black	
General	Design Plug-in terminal RM 5.08	
Connection device	Screw terminal	
Connection cross-section	AWG 28 – AWG 12	
Connection cross-section	0.08 – 2.5 mm ²	
Housing material	PA 6.6 (UL 94 V-0)	
Colour of the housing	black	
Operating voltage	max. AC/DC 300 V	
Operating current	max. 12 A	
Mounting	DIN rail mountable TS35 with interlock (EN 60715)	
Contact material	CuNiZn	

25.08.2017 – Subject to technical modification

Part-No. 780922.002.2

USA: LUTZE INC.

13330 South Ridge Drive · Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 · Fax +1 (704) 504-0223
www.lutze.com · info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington · GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 · Fax +44 (0)1827 31333-2
www.lutze.com · sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY


Technical data sheet - Load monitoring

Over voltage category	III
Degree of pollution	3
Pole number	8
Dimensions (w x h x d)	43.1 x 12.7 x 16.8 mm
Weight	0.100 kg/piece
Approvals	UR
PU	10 piece

General ambient conditions

Operation temperature range	-40 °C ... +85 °C
Storage temperature range	-40 °C ... +85 °C
Protection class	IP20

Dimensions

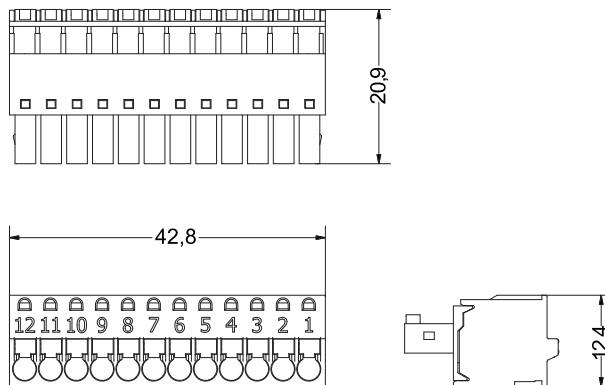

25.08.2017 – Subject to technical modification

Part-No. 780922.002.2

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk