


Technical data sheet · LÜTZE SUPERFLEX[®] N (C) PVC

For high requirements

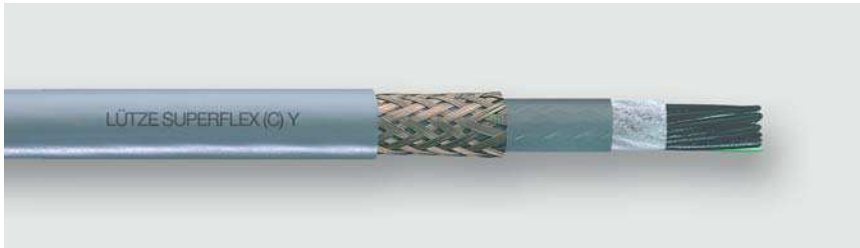

PVC control cables · C-track compatible · shielded

Identification	Type	SU N(C)Y(12G0,5) UL
	Part-No.	A1392012

Use/Application/Characteristics

Application	<ul style="list-style-type: none"> • Machine and device construction, transport and conveyor technology, HVAC technology • In dry and damp rooms • As a monitoring, measurement and control cable for industrial applications • For installation in energy chains with constant linear movement • Anywhere where electrical interference fields can influence the signal transmission
Characteristics	<ul style="list-style-type: none"> • Very small cable diameters due to special TPE conductor insulation (HGI) according to UL standard • Reduced friction due to high glide conductor insulation (HGI) for high mechanical loads • Low capacitance, very good electrical properties • Especially developed PVC jacket according to UL class 43 • Filler without wick effect • Low adhesion, abrasion-resistant, nick-resistant, tear resistant • Hydrolysis-resistant, microbe-resistant, and rot-resistant • Use in dry or damp environment • Silicone free • RoHS-compliant

Construction

Description	SUPERFLEX N (C) PVC
-------------	---------------------

29.01.2017 – Subject to technical modification

Part-No. A1392012

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
 www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
 www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SUPERFLEX[®] N (C) PVC

For high requirements

Number of conductors/cross-section	(12G0.5)
Jacket material	Special PVC
Jacket color	grey RAL 7001
Outer Ø	11.3 mm
Outer Ø	0.444 inches
Weight	18.5 kg/100 m
Weight	129 Lbs/Mft
Cu-Index	9.6 kg/100 m
Cu-Index	64 Lbs/Mft

Element 1

Element construction	AWG20/12C
Conductor	CU-wire bare
Conductor category	Superfinely stranded DIN VDE 0295 IEC 60228, Class 6
Conductor marking	black with black number print green/yellow
Conductor insulation	Special TPE

overall construction

Overall wrapping	Non-woven material
Inner jacket	PVC
Overall shield	Braid shield Tinned copper wires
Jacket characteristics	abrasion resistant tough Weather resistant hydrolysis-resistant microbe resistant rot-resistant UV resistant (normal lighting conditions) Oil resistant Flame-retardant Silicone-free

Technical data

Rated voltage	600 V UL AWM
Test voltage type	AC 3000 V
Temperature range moving	-5 °C ... +80 °C
Temperature range fixed	-40 °C ... +80 °C
Minimum bending radius moving	10×D

29.01.2017 – Subject to technical modification

Part-No. A1392012

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE SUPERFLEX® N (C) PVC

For high requirements

Minimum bending radius fixed 6×D

Element 1

Element construction AWG20/12C
 Insulation resistance at 20°C 100.0 MΩ×km

Approvals/Standards

Approvals	cURus CSA AWM I/II A/B 80°C 600V FT1
UL style	AWM 2570 AWM 10429
Conformity	CE RoHS REACH
Burning behavior	UL VW-1 CSA FT1 IEC 60332-1-2 VDE 0482 322-1-2
Oil resistant according to	UL 4d100C UL Oil Res 80 °C IEC 60811-404
UV-resistant according to	DIN EN ISO 4892-2-A

General

Note CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU

Symbols



29.01.2017 – Subject to technical modification

Part-No. A1392012

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
 www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
 www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY