

Technical data sheet · LUTZE DRIVEFLEX® XLPE (C) Servo I PVC with one Control pair and UL/TC-ER/WTTC/CE Approvals



Flexible Composite VFD, Servo &
Motor Supply Cable · Shielded

| | | |
|-----------------------|----------|---|
| Identification | Type | VFD XLPE (C) SE I PVC (4×AWG6+(2×AWG14)) |
| | Part-No. | A2170604 |

Use/Application/Characteristics

| | |
|-----------------|---|
| Application | <ul style="list-style-type: none"> • Shielded multi-conductor cable for VFD and Motor applications to connect power from drives to motors • Cable design for harsh industrial environments and operating conditions with high noise levels • XLPE thick wall insulation with low capacitance, ideal for applications with high voltage spikes and long cable runs • Compliant with NFPA 79 for wiring of industrial machinery • TC-ER for use with cable trays without conduit, which can reduce material and labor costs • WTTC – wind turbine tray cable rating for use in wind power generation • Dry, damp or wet conditions |
| Characteristics | <ul style="list-style-type: none"> • Flexible XLPE conductor design • Non-wicking fillers • Effective dual layer shield for EMC compliance • Specially formulated jacket for oil resistance and easy strip design • Low capacitance cable • Sunlight resistant • Direct burial • UL Type TC-Exposed Run • Talc free and silicone free |

10.03.2017 – Subject to technical modification

Part-No. A2170604

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LUTZE DRIVEFLEX[®] XLPE (C) Servo I PVC with one Control pair and UL/TC-ER/WTTC/CE Approvals

Construction

| | |
|------------------------------------|--------------------------------|
| Description | DRIVEFLEX XLPE (C) SERVO I PVC |
| Number of conductors/cross-section | (4AWG6+1×2×AWG14) |
| Jacket material | PVC |
| Jacket color | black RAL 9005 |
| Outer Ø | 27.8 mm |
| Outer Ø | 1.095 inches |
| Weight | 129.9 kg/100 m |
| Weight | 873 Lbs/Mft |
| Cu-Index | 453 Lbs/Mft |

Element 1

| | |
|------------------------|--|
| Element construction | AWG6/4C |
| Conductor construction | AWG 6 (266/30) |
| Conductor | AWG conductor CU-wire tin-plated |
| Conductor category | feindrätig |
| Conductor marking | black with white number print green/yellow |
| Conductor insulation | XLPE RHW-2 |
| Stranding | Strands braided together |

Element 2

| | |
|------------------------|-------------------------------------|
| Element construction | AWG14/1TSP |
| Conductor construction | AWG 14 (41/30) |
| Conductor | AWG conductor CU-wire tin-plated |
| Conductor category | feindrätig |
| Conductor marking | black with white number print |
| Conductor insulation | XLPE XHHW-2 |
| Stranding | Conductors stranded in pairs |

overall construction

| | |
|------------|--------------------|
| Drain wire | CU-wire tin-plated |
|------------|--------------------|

10.03.2017 – Subject to technical modification

Part-No. A2170604

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LUTZE DRIVEFLEX[®] XLPE (C) Servo I PVC with one Control pair and UL/TC-ER/WTTC/CE Approvals

| | |
|------------------------|---|
| Overall shield | Foil shield Tinned copper wires Braid shield optical cover approx. 80% |
| Jacket characteristics | Oil resistant Silicone-free |

Technical data

| | |
|------------------------------|---|
| Rated voltage | 600 V TC-ER 1000 V Flexible VFD servo cable 90C 1000 V WTTC |
| Temperature range fixed | -40 °C ... +90 °C |
| Minimum bending radius fixed | 6×D |

Element 1

| | |
|----------------------|---------|
| Element construction | AWG6/4C |
|----------------------|---------|

Element 2

| | |
|----------------------|------------|
| Element construction | AWG14/1TSP |
|----------------------|------------|

Approvals/Standards

| | |
|----------------------------|--|
| Approvals | cULus TC-ER UL DP-1 WTTC Class 1 Div. 2 per NEC Art. 336, 392, 501 cUL TC CIC FT4 UL 1277 Wet/Dry P-07-KA130021-MSHA |
| Conformity | CE RoHS REACH |
| Oil resistant according to | Oil Res II |

General

| | |
|------|--|
| Note | CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU |
|------|--|

Symbols

10.03.2017 – Subject to technical modification

Part-No. A2170604

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

**Technical data sheet · LUTZE DRIVEFLEX® XLPE (C) Servo I PVC
with one Control pair and UL/TC-ER/WTTC/CE Approvals**

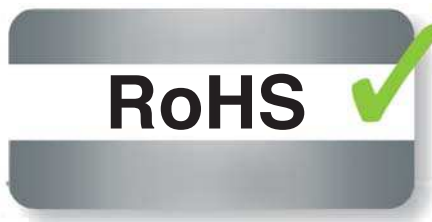

10.03.2017 – Subject to technical modification

Part-No. A2170604

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk