

Technical data sheet · LÜTZE ELECTRONIC PLTC PVC with UL/CE/PTLC Approvals



Flexible electronic cable · Unshielded

Identification	Type	LIYY 8×AWG22 UL/PLTC
	Part-No.	A3032208

Use/Application/Characteristics

Application	<ul style="list-style-type: none"> • Industrial grade PLTC electronic cable for machine tools, process instrumentation and controls, computer peripherals, HVAC technology, assembly and production lines, low voltage interconnect and other industrial applications including installation in cable trays
Characteristics	<ul style="list-style-type: none"> • Flexible for easy installation • Easy strip design • Color coded conductors • Specially formulated jacket for oil resistance • Premium durability • Extended temperature range • UL listed and NFPA 79 compliant

Construction

Description	ELECTRONIC PLTC PVC
Number of conductors/cross-section	8×AWG22
Jacket material	PVC
Jacket color	grey RAL 7001
Outer Ø	6 mm
Outer Ø	0.243 inches
Weight	42 Lbs/Mft

24.03.2017 – Subject to technical modification

Part-No. A3032208

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LÜTZE ELECTRONIC PLTC PVC with UL/CE/PTLC Approvals

Cu-Index 19 Lbs/Mft

Element 1

Element construction AWG22/8C
Conductor construction AWG 22 (19/34)
Conductor AWG conductor
CU-wire tin-plated
Conductor category feindrähtig
Conductor marking black
brown
red
orange
yellow
green
blue
violet
Conductor insulation SR-PVC

overall construction

Jacket characteristics Flame-retardant
Oil resistant
Silicone-free

Technical data

Rated voltage UL 300 V
Temperature range fixed -25 °C ... +105 °C
Minimum bending radius fixed 4×D

Element 1

Element construction AWG22/8C

Approvals/Standards

Approvals cULus
PLTC
UL Type CM
cURus
AWM II A/B
NEC 725, 760, 800
Class 1 Div. 2 (PLTC use only)
UL style AWM 2464
Conformity CE
REACH
RoHS

24.03.2017 – Subject to technical modification

Part-No. A3032208

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY


Technical data sheet · LÜTZE ELECTRONIC PLTC PVC with UL/CE/PTLC Approvals

Burning behavior according to	UL VW-1 UL FT4
Oil resistant according to	Oil Res II

General

Note CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU

Symbols

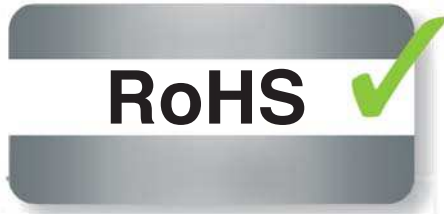

24.03.2017 – Subject to technical modification

Part-No. A3032208

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY