

Technical data sheet · LÜTZE ELECTRONIC (C) PLTC PVC TPC with twisted pairs and UL/CE/PTLC Approvals



Flexible electronic cable · Shielded

Identification	Type	LIY(C)PVC TP (8×2×AWG22)UL/cURus/CE/PLTC
	Part-No.	A3142216

Use/Application/Characteristics

Application	• Double shielded industrial grade PLTC electronic cable for machine tools, process instrumentation and controls, computer peripherals, HVAC technology, assembly and production lines, low voltage interconnect and other industrial applications including installation in cable trays
Characteristics	• Flexible for easy installation • Easy strip design • Color coded conductors • Conductors twisted in pairs • Specially formulated jacket for oil resistance • Premium durability • Extended temperature range • UL listed and NFPA 79 compliant

Construction

Description	ELECTRONIC (C) PLTC PVC TP
Number of conductors/cross-section	16×AWG22
Jacket material	PVC
Jacket color	grey RAL 7001
Outer Ø	9.6 mm

10.03.2017 – Subject to technical modification

Part-No. A3142216

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk

Technical data sheet · LÜTZE ELECTRONIC (C) PLTC PVC TPC with twisted pairs and UL/CE/PTLC Approvals

Outer Ø	0.378 inches
Weight	98 Lbs/Mft
Cu-Index	54 Lbs/Mft

Element 1

Element construction	AWG22/8TP
Conductor construction	AWG 22 (19/34)
Conductor	AWG conductor CU-wire tin-plated
Conductor category	feindrähtig
Conductor marking	white black white brown white red white orange white yellow white green white blue white violet
Conductor insulation	SR-PVC
Stranding	Conductors stranded in pairs

overall construction

Drain wire	CU-wire tin-plated
Overall shield	Aluminium laminate Aluminium laminate Braid shield Tinned copper wires
Jacket characteristics	Flame-retardant Oil resistant Silicone-free

Technical data

Rated voltage UL	300 V
Temperature range fixed	-25 °C ... +105 °C
Minimum bending radius fixed	6×D

10.03.2017 – Subject to technical modification

Part-No. A3142216

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Technical data sheet · LÜTZE ELECTRONIC (C) PLTC PVC TPC with twisted pairs and UL/CE/PTLC Approvals

Element 1

Element construction

AWG22/8TP


Approvals/Standards

Approvals	cULus PLTC UL Type CM cURus AWM II A/B NEC 725, 760, 800 Class 1 Div. 2 (PLTC use only)
UL style	AWM 2464
Conformity	CE REACH RoHS
Burning behavior according to	UL VW-1 UL FT4
Oil resistant according to	Oil Res II

General

Note CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU

Symbols

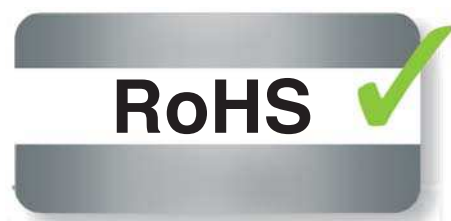

10.03.2017 – Subject to technical modification

Part-No. A3142216

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY