

Technical data sheet · LUTZE Single Conductor Hook Up Wire with UL/CE/MTW and HAR Approvals

Flexible Single Conductor Hook
Up Wire · Multi-Norm

Leerwert Standard- sprache

Identification	Type	1×0,5
	Part-No.	A62001

Use/Application/Characteristics

Application	<ul style="list-style-type: none">• Multi rated single-conductor cable for wiring of cabinets and use in electrical and electronic equipment• Specially suited for machines exported to Europe (HAR) and North America (UL MTW + CSA TEW)• MTW rating as required per NFPA 79 for machine tool wiring
Characteristics	<ul style="list-style-type: none">• Fine stranding class 5, per VDE 2095• Very flexible for easy installation• Free from silicone and other varnish damaging substances• Conditionally resistant to oils, solvents, acids and bases• MTW rated• RoHS compliant

Construction

Description	SINGLE CONDUCTOR HOOK UP WIRE MULTI-NORM
-------------	--

Element 1

Conductor	CU-wire tin-plated
Conductor category	Finely stranded DIN VDE 0295 IEC 60228, Class 5
Conductor insulation	PVC

11.03.2017 – Subject to technical modification

Part-No. A62001

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LUTZE Single Conductor Hook Up Wire with UL/CE/MTW and HAR Approvals

Conductor insulation standard	UL 1581 Class 43 heat and humidity resistant
-------------------------------	---

Technical data

Rated voltage U ₀ /U	450/750 V
Rated voltage UL	600 V
Test voltage type	AC 3000 V
Temperature range moving	-5 °C ... +105 °C
Temperature range fixed	-40 °C ... +105 °C
Minimum bending radius fixed	5×D

Approvals/Standards

Approvals	cULus cURus UL 1063 MTW Listed TEW HAR HAR: HD 21.3 S3
UL style	AWM 1015
Conformity	CE RoHS REACH
Burning behavior according to	UL VW-1 IEC 60332-1

General

Note	CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU
------	--

Symbols



11.03.2017 – Subject to technical modification

Part-No. A62001

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com


United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet · LUTZE Single Conductor Hook Up Wire with UL/CE/MTW and HAR Approvals

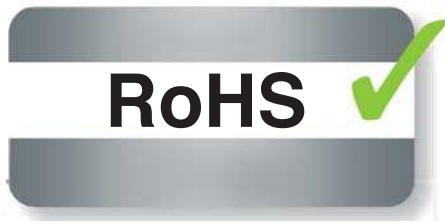

◁HAR▷

11.03.2017 – Subject to technical modification

Part-No. A62001

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY