



Temposonics®

Magnetostrictive Linear Position Sensors



ET Analog / SSI / Start/Stop Product Brief

- ▶ **Global approvals:**
ATEX / IECEx / CEC / NEC
- ▶ **Compact installation dimensions**
- ▶ **High operating temperature up to maximum +105 °C (+221 °F)**

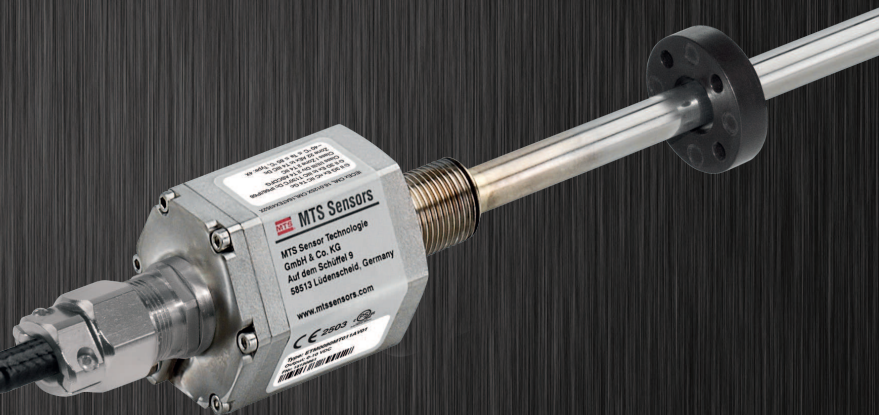

STAYS COOL...

DESPITE ENORMOUS HEAT


The ET sensor has a wide operating temperature range of -40 °C (-40 °F) to maximum $+105\text{ °C}$ ($+221\text{ °F}$). Under these varied conditions the sensor is able to accurately reproduce the measured values.

AND EXTREME CONDITIONS!

Your application operates in a hazardous environment? The ET offers ATEX, IECEx, CEC and NEC certifications allowing for safe use in hazardous applications. The sensor is designed for use in Class I, II, III Division 2 as well as in Zone 2 and in Zone 22.

TYPICAL APPLICATIONS

Gas turbines, valves for turbines, energy cylinders, wood processing, steel plants.

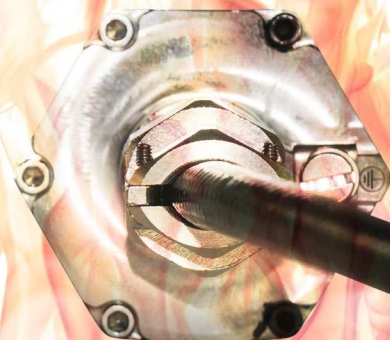



Document Part Number:
551732 Revision B (EN) 04/2017

LOTS OF TECHNOLOGY IN A SMALL SPACE

The compact housing of the ET sensor contains the latest technology of the E-Series. The ET is available with a Start / Stop interface, with an analog output for simple and direct measurements, and with a SSI interface for digital measurements. In addition to the Teflon® cable, a silicone cable can also be used in hazardous areas in order to transmit the measured values from the sensor.

Analog	4(0)...20 mA and / or 20...4(0) mA 0...10 VDC and / or 10...0 VDC	See data sheet for more information ET Analog (Document part no. 551898)
	Operating temperature: -40...+85 °C (-40...+185 °F)	
SSI	SSI (Synchronous Serial Interface) – Differential signal in SSI standard	See data sheet for more information ET SSI (Document part no. 551899)
	Operating temperature: -40...+90 °C (-40...+194 °F)	
Start/ Stop	RS-422 differential signal Serial parameter upload available for: Stroke length, offset, gradi- ent, status, serial number and manufacturer number	See data sheet for more information ET Start/Stop (Document part no. 551676)
	Operating temperature: -40...+105 °C (-40...+221 °F)	

LOCATIONS

USA
MTS Systems Corporation
Sensors Division
3001 Sheldon Drive
Cary, N.C. 27513, USA
Tel. +1 919 677-0100
Fax +1 919 677-0200
info.us@mtssensors.com
www.mtssensors.com

JAPAN
MTS Sensors Technology Corp.
737 Aihara-machi,
Machida-shi,
Tokyo 194-0211, Japan
Tel. +81 42 775-3838
Fax +81 42 775-5512
info.jp@mtssensors.com
www.mtssensors.com

FRANCE
MTS Systems SAS
Zone EUROPARC Bâtiment EXA 16
16/18, rue Eugène Dupuis
94046 Creteil, France
Tel. +33 1 58 4390-28
Fax +33 1 58 4390-03
info.fr@mtssensors.com
www.mtssensors.com

GERMANY
MTS Sensor Technologie
GmbH & Co. KG
Auf dem Schüffel 9
58513 Lüdenscheid, Germany
Tel. +49 2351 9587-0
Fax +49 2351 56491
info.de@mtssensors.com
www.mtssensors.com

CHINA
MTS Sensors
Room 504, Huajing Commercial Center,
No. 188, North Qinzhou Road
200233 Shanghai, China
Tel. +86 21 6485 5800
Fax +86 21 6495 6329
info.cn@mtssensors.com
www.mtssensors.com

ITALY
MTS Systems Srl
Sensor Division
Via Camillo Golgi, 5/7
25064 Gussago (BS), Italy
Tel. +39 030 988 3819
Fax +39 030 982 3359
info.it@mtssensors.com
www.mtssensors.com

LEGAL NOTICES

MTS, Temposonics and Level Plus are registered trademarks of MTS Systems Corporation in the United States; MTS SENSORS and the MTS SENSORS logo are trademarks of MTS Systems Corporation within the United States. These trademarks may be protected in other countries. All other trademarks are the property of their respective owners. Copyright © 2017 MTS Systems Corporation. No license of any intellectual property rights is granted. MTS reserves the right to change the information within this document, change product designs, or withdraw products from availability for purchase without notice. Typographic and graphics errors or omissions are unintentional and subject to correction. Visit www.mtssensors.com for the latest product information.

ISO 9001
CERTIFIED



Reg.-No. 003095-0M08



MTS Sensors has a dedicated expert support team available to assist with your specific application needs. Contact an office in your region.