
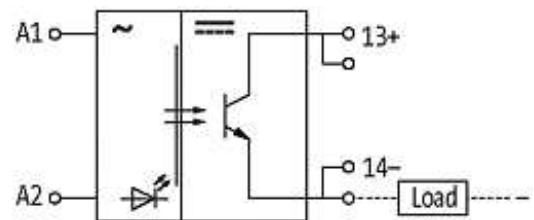


EMMDS 30-64/0,1 OPTO-COUPLER MODULE

IN: 230 VAC - OUT: 40 VDC / 0,1 A

Transistor 0.1 A
230 V AC
Double terminals on the output side[Link to Product](#)**Illustration**

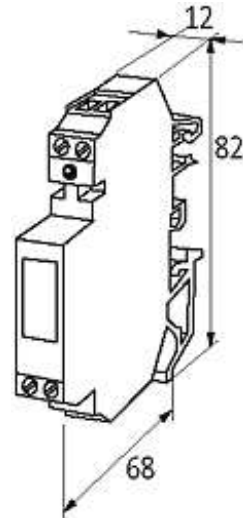

Product may differ from Image

Input

Voltage range ON	195...253 V AC
Voltage range OFF	0...110 V AC
Input current	7.5 mA
LED display	LED (red)

General data

Test isolation voltage	3.75 kV
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H × W × D	82×12×64 mm

Output

Switching voltage	4...40 V DC
Switching current per output	1 mA...0.1 A
Saturation voltage (across output)	max. 1.2 V DC
Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	50/120 ms
Switching frequency	max. 10/1 Hz (resist./ind.)

Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1