


Emergency stop with 2 positive opening

contacts in a 42mm enclosure


E-Stop 42 2NC M12(4)
with M12 connection
4-pole
2 NC (positively-opening)

[Link to Product](#)


Illustration

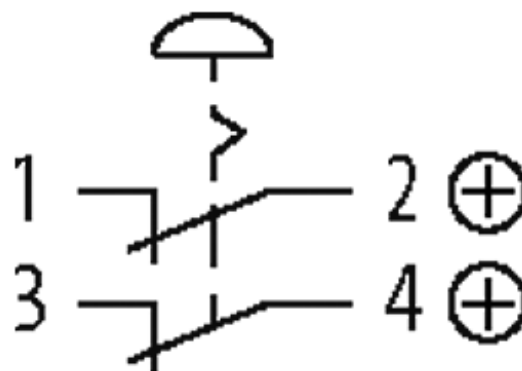

Male



PIN 1: N/C 1
PIN 2: N/C 1
PIN 3: N/C 2
PIN 4: N/C 2

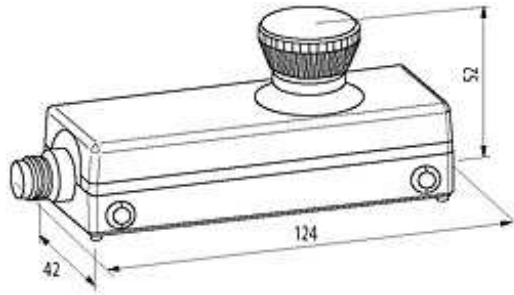

Product may differ from Image

Approvals



Contact layout

PIN 1	N/C 1
PIN 2	N/C 1
PIN 3	N/C 2
PIN 4	N/C 2

Utilization category

AC-15	1.5 A (240 V AC)
DC-13	2 A (24 V DC)

General data

Mech./ elect. life	50.000 actuations, load-temperature dependent
Lambda (d)	20 % (N/C)
Contact material	Ag Ni
B10d	250.000
Protection	IP65
Connection	M12 (4-pole)
Mounting method	with clip on back
Temperature range	-25...+70 °C (storage temperature -25...+85 °C)
Dimensions H x W x D	52x124x42 mm

Technical Data

Switching capacity	15 A (AC 15); 2.2 A (DC 13)
Contact bounce time	max. 10 ms

Commercial data

country of origin	DE
customs tariff number	85365080
minimum order quantity	1