

MTPS POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 230/400+/-15VAC OUT: :24V/4ADC


Current: 4 A


Output rating: 96 W

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

[Link to Product](#)

Illustration

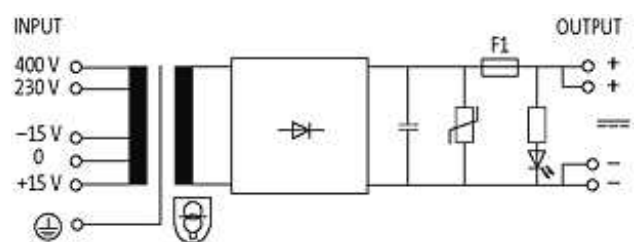

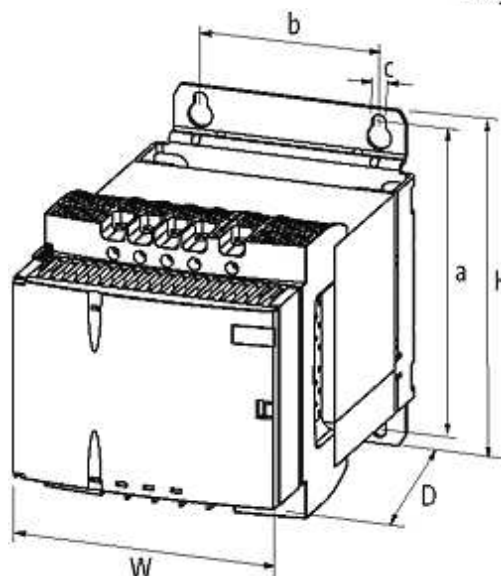

Product may differ from Image

Approvals



Input

Input voltage	230/400 $\pm$ 15 V AC
Input fuse (external)	0.4 A (T) (230 V AC); 25 A (T) (400 V AC)
Frequency	50...60 Hz
LED display	LED (green) for input voltage
Input current	0.79 A (230 V AC); 0.46 A (400 V AC)

General data

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Temperature range	-20...+60 °C, no condensation
Mounting method	DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting
Dimensions H x W x D	108x87x165 mm
Fixing centers a x b x c	96x60x5.5 mm

Output

Output voltage	24 V DC (SELV)
Ripple	max. 5 %rms
Output current	max. 4 A
Output fuse	4 A (T)
Output filter	LED, VDR and smoothing capacitor

Commercial data

country of origin	CZ
customs tariff number	85044090

minimum order quantity

1