


## MTL 1-PHASE CONTROL AND ISOLATION TRANSFORMER


P: 400VA IN: 230/400VAC +/- 15VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers  
400 VA  
Isolation class T 60/B

### [Link to Product](#)

#### Illustration

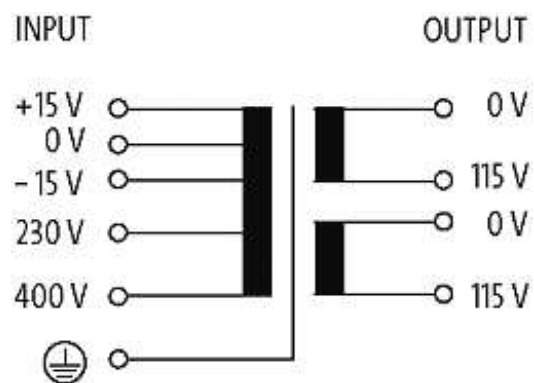

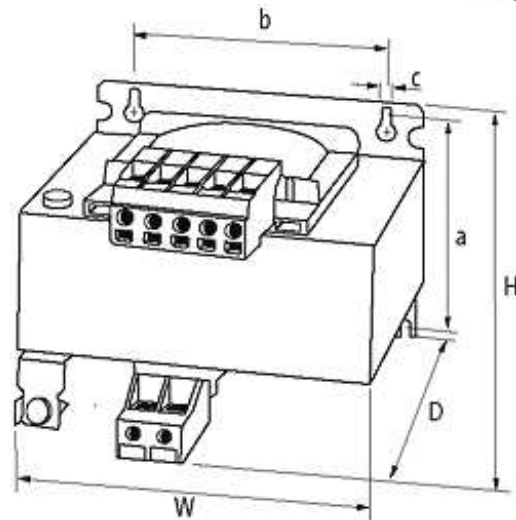

Product may differ from Image

### Approvals



### Input

Input voltage	230/400 ±15 V AC
Inrush current	32 A (230 V AC); 18.48 A (400 V AC)
Input current	2 A (230 V AC); 1.17 A (400 V AC)
Short-circuit current	59 A (230 V AC); 34.1 A (400 V AC)
Frequency	50...60 Hz

### General data

Test isolation voltage	4 kV (prim./sec.)
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Drill hole Ø	7×11 mm
Mounting method	DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting
Fixing centers a × b × c	95×122×7 mm
Dimensions H × W × D	113×151×146 mm
Temperature range	-20...+60 °C, no condensation

### Output

Output voltage	1 × 230, 1 × 115, 2 × 115 V AC
----------------	--------------------------------

### Commercial data

country of origin	CZ
customs tariff number	85043180
minimum order quantity	1