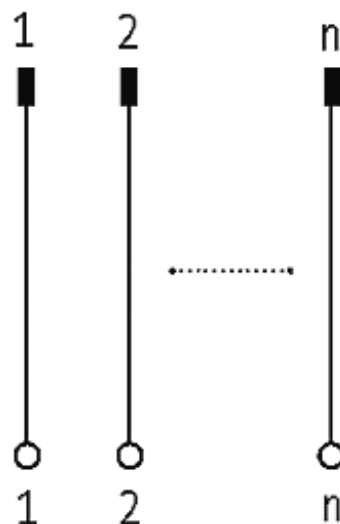


TRANSFER PLUG , PASSIV


UFL 40-pole

Ribbon cable connector
40-pole
Spring clamp terminals

Via the combined fixing mechanism, connectors with or without strain relief can be connected.

[Link to Product](#)**Illustration**

stay connected

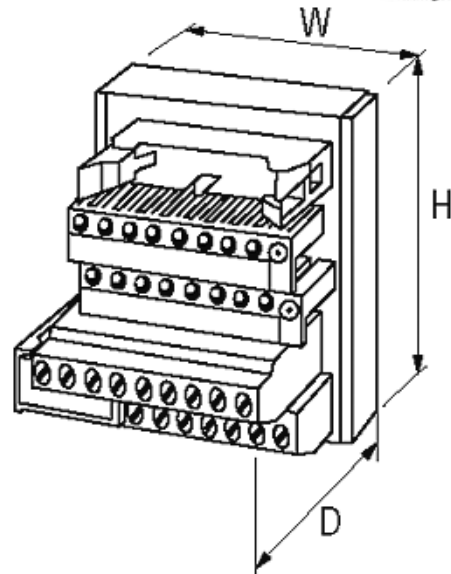

Product may differ from Image

General data

Temperature range	-20...+70 °C
Pollution Degree	2
Dimensions H × W × D	75×70×70 mm
Connection	Spring clamp terminals
Mounting method	DIN-rail mountable (EN 60715)

Technical Data

Operating voltage	24 V DC
Operating current per bit	max. 1 A
Material group	EN 60664-1 over voltage, category III
Plug connector	for plugs with or without strain relief (DIN 41651); for plugs with strain relief, it may be necessary to remove the bottom hook

Commercial data

country of origin	CZ
customs tariff number	85366990
minimum order quantity	10