

## MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER


P: 250VA IN: 208...550VAC OUT: 2x115VAC special dimensions

Single-phase - Control and Isolation Transformers  
250 VA  
Isolation class T 40/B

Other voltages on request.

### [Link to Product](#)

#### Illustration

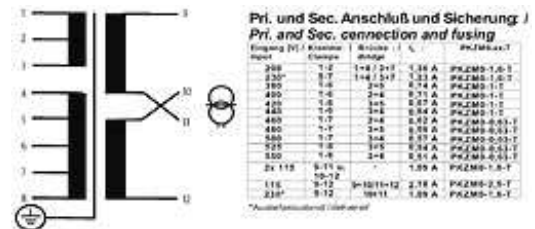

Product may differ from Image

#### Approvals



#### Input

Input voltage	208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC
Input current	1.36 A (208 V AC); 0.51 A (550 V AC)
Inrush current	26 A (208 V AC); 9.6 A (550 V AC)
Short-circuit current	25 A (208 V AC); 9.2 A (550 V AC)
Frequency	50...60 Hz

#### General data

Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Dimensions H x W x D	102x120x122 mm
Fixing centers a x b x c	70x90 mm
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

#### Output

Output voltage	1 x 230, 1 x 115, 2 x 115 V AC
----------------	--------------------------------

#### Commercial data

country of origin	CZ
customs tariff number	85043180

---

minimum order quantity	1
------------------------	---