

MDT three-phase control and isolation transformer


P:21000VA IN:3x400VAC±5% OUT:3x400VAC

3-phase isolation transformer
21000 VA
Isolation class T 40/H

Other voltages on request.

[Link to Product](#)

Illustration

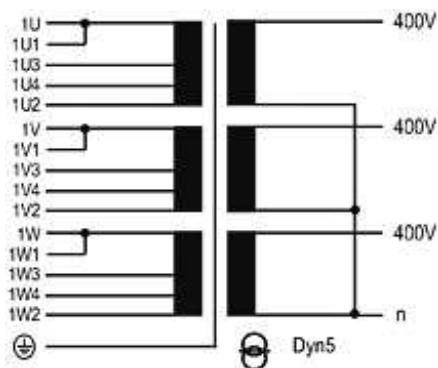

Pri. Anschluß / Pri. connection

Eingang / Input	Klemme / terminal	Verbindung / connection
-5%	1U; 1V; 1W	1U1+1V2; 1V1+1U3; 1W1+1V3
400V	1U; 1V; 1W	1U1+1V4; 1V1+1U4; 1W1+1V4
+5%	1U; 1V; 1W	1U1+1W2; 1V1+1U2; 1W1+1V2

Product may differ from Image

Input

Input voltage	3 × 400 V AC ±5 %
Input current	31.7 A (3 × 400 V AC)
Inrush current	ca. 21×In
Short-circuit current	749 A
Frequency	50...60 Hz

General data

Test isolation voltage	4.5 kV (prim./sec.)
Mounting method	screw fixing
Dimensions H × W × D	460×420×260 mm
Fixing centers a × b × c	316×173 mm
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

Output

Output voltage	3 × 400 V AC
----------------	--------------

Commercial data

country of origin	DE
customs tariff number	85043300
minimum order quantity	1