

MDST THREE-PHASE AUTOTRANSFORMER


P:5200VA IN:3x400/440VAC OUT:3x230VAC

Autotransformer
5200 VA
Isolation class T 40/B

Other voltages on request.

[Link to Product](#)

Illustration

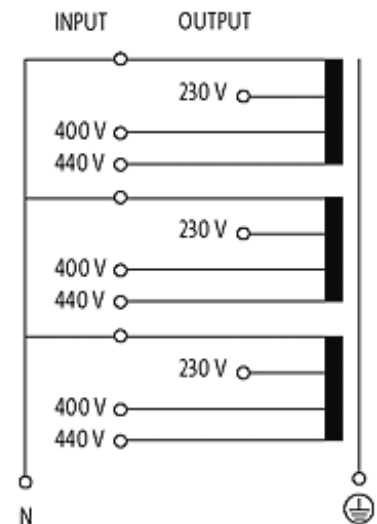

Product may differ from Image

Input

Input voltage	3 × 400/440 V AC
Input current	7.7 A (400 V AC); 7 A (440 V AC)
Inrush current	52 A (400 V AC)
Short-circuit current	657 A (400 V AC)
Frequency	50...60 Hz

General data

Standards	EN 61558-2-4, EN 62041 category 0
Test isolation voltage	3 kV
Mounting method	Key-hole mounting
Dimensions H × W × D	206×240×152 mm
Fixing centers a × b × c	125×190×10 mm
Drill hole Ø	18×10 mm
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

Output

Output voltage 3 × 230 V AC

Commercial data

country of origin CZ

customs tariff number 85043200

minimum order quantity 5