

## MST SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER


P:2500VA IN:690VAC OUT:230VAC


Single-phase - Control and Isolation Transformers  
2500 VA  
Isolation class T 40/B

Other voltages on request.

### [Link to Product](#)

#### Illustration

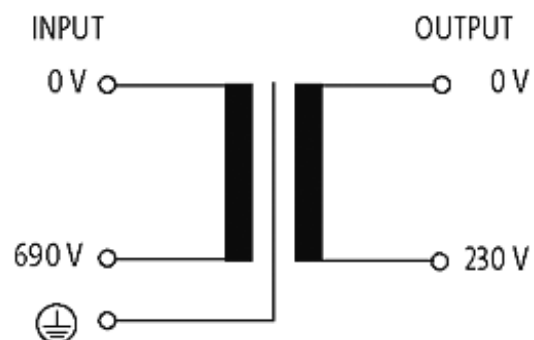

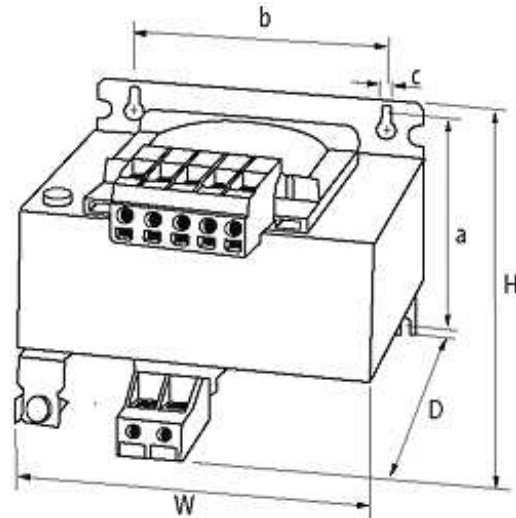

Product may differ from Image

### Input

Input voltage	690 V AC
Input current	3.9 A (690 V AC)
Inrush current	64 A (690 V AC)
Short-circuit current	127 A (690 V AC)
Frequency	50...60 Hz

### General data

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Test isolation voltage	6.5 kV
Mounting method	Long-hole mounting
Dimensions H × W × D	250×197×174 mm
Fixing centers a × b × c	130×150×10 mm
Drill hole Ø	18×10 mm
Temperature range	-20...+40 °C, no condensation

### Output

Output voltage	230 V AC
----------------	----------

### Commercial data

country of origin	CZ
customs tariff number	85043200
minimum order quantity	5