


Modlink MSDD-set: Frame 4000-68123-0000000,
insert 4000-68000-0010000 + 4000-68000-1310000

[Link to Product](#)

Illustration



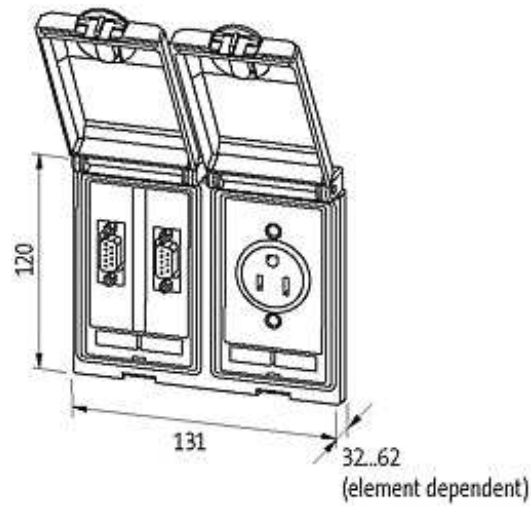

Product may differ from Image

Inserts

4000-68123-0000000

4000-68000-0010000

4000-68000-1310000

General data

Mounting depth mounted approx. 62 mm

Frame

suitable for mounting with wall thickness 1...5 mm

Protection IP65

Housing Zinc die-casting, with surface finishing

Temperature range -10...+60 °C (storage temperature -25...+60 °C)

Shielded yes

Sockets

Operating voltage max. 250 V AC

Operating current max. 16 A

Connection Screw terminals: max. 6 mm²

RJ45

Operating voltage max. 30 V AC/42.4 V DC

Operating current max. 175 mA

Locking of ports staple

Specification CAT6, class EA (ISO/IEC 11801:2002), (EN 50173-1)

Mounting depth mounted approx. 32 mm

Shielded yes

USB

Operating voltage max. 30 V AC/DC

Operating current max. 1 A

Locking of ports Snap In

Specification 2.0/Type 2dB (max. 480 Mbit/s)

Shielded yes

Commercial data

country of origin DE

customs tariff number 85366990

minimum order quantity 1