


Modlink MSDD-set: Frame 4000-68123-0000000,
insert 4000-68000-0010000 + 4000-68000-1440000

[Link to Product](#)

Illustration



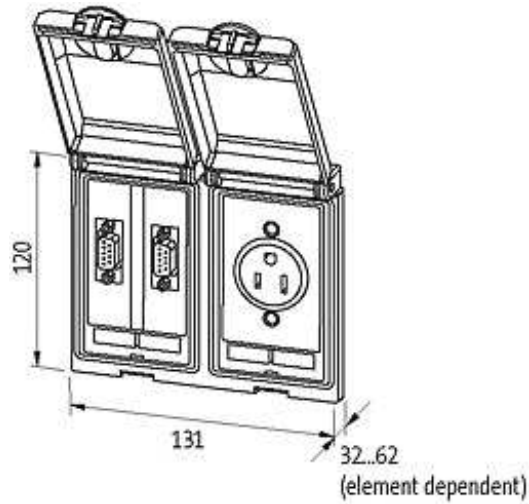

Product may differ from Image

Approvals

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16



Inserts

4000-68123-0000000

4000-68000-0010000

4000-68000-1440000

General data

Mounting depth mounted approx. 62 mm

Sockets

Operating voltage max. 250 V AC

Operating current max. 16 A

Connection Screw terminals: max. 6 mm²

Communication inserts

Operating voltage SUB-D: max. 125 V AC/150 V DC; RJ45: max. 48 V AC/DC; RJ12: max. 48 V AC/DC; USB: max. 30 V AC/DC; PS2: max. 30 V AC/DC; DVI: max. 40 V AC

Operating current SUB-D: max. 3 A; RJ45: max. 1 A; RJ12: max. 1 A; USB: max. 1 A; PS2: max. 1 A; DVI: max. 1.5 A

Connection cross section SUB-D: max. 0.5 mm² (AWG 20); PS2: max. 0.22 mm² (AWG 24)

Locking of ports SUB-D: UNC 4...40 bolt; RJ45: staple; RJ12: staple; USB: snap-in; PS2: snap-in

Specification SUB-D: (DIN 41652/IEC 60807-1); RJ45: CAT5e (100 MHz - Mbit/s); USB: 2.0/Type 2dB (max. 480 Mbit/s)

Mounting depth mounted SUB-D: approx. 32 mm; RJ45: approx. 32 mm; RJ12: approx. 32 mm; USB: approx. 80 mm; PS2: approx. 32 mm

Shielded yes

Commercial data

country of origin CZ

customs tariff number 85366990

minimum order quantity 1