



**Modlink MSDD-set: Frame 4000-68223-0000000,**  
insert 4000-68000-1210000 + 4000-68000-0100000

[Link to Product](#)

Illustration

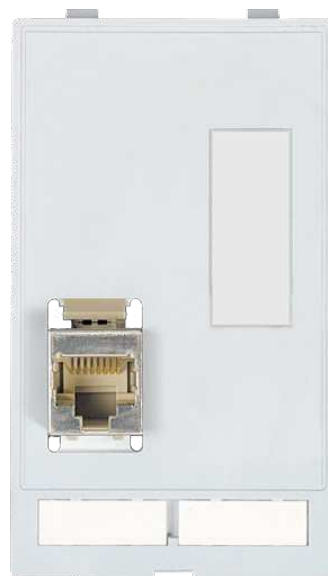

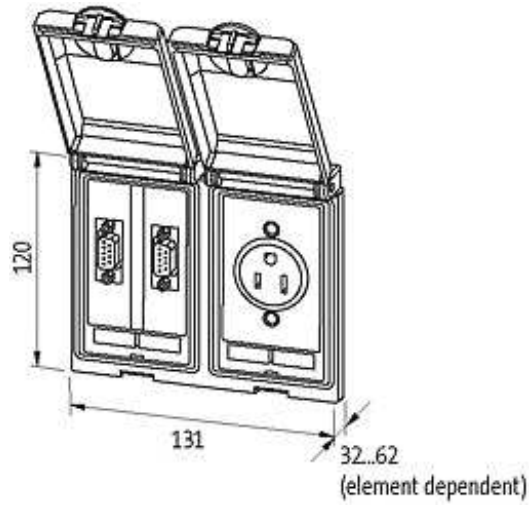

Product may differ from Image

## Sockets

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

Article number	4000-68000-0100000
Operating voltage	EURO: max. 250 V AC, USA: max. 127 V AC
Operating current	EURO: max. 16 A, USA: max. 15 A
Connection	Screw terminals: max. 2 × 2.5 mm <sup>2</sup> (AWG 14)
Mounting depth mounted	approx. 20 mm
Dimensions H × W × D	88×51×30 mm

### Communication inserts

Article number	4000-68000-1210000
Operating voltage	SUB-D: max. 125 V AC/150 V DC; RJ45: max. 48 V AC/DC; RJ12: max. 48 V AC/DC; USB: max. 30 V AC/DC; PS2: max. 30 V AC/DC; DVI: max. 40 V AC
Operating current	SUB-D: max. 3 A; RJ45: max. 1 A; RJ12: max. 1 A; USB: max. 1 A; PS2: max. 1 A; DVI: max. 1.5 A
Connection cross section	SUB-D: max. 0.5 mm <sup>2</sup> (AWG 20); PS2: max. 0.22 mm <sup>2</sup> (AWG 24)
Locking of ports	SUB-D: UNC 4...40 bolt; RJ45: staple; RJ12: staple; USB: snap-in; PS2: snap-in
Specification	SUB-D: (DIN 41652/IEC 60807-1); RJ45: CAT5e (100 MHz - Mbit/s); USB: 2.0/Type 2dB (max. 480 Mbit/s)
Mounting depth mounted	SUB-D: approx. 32 mm; RJ45: approx. 32 mm; RJ12: approx. 32 mm; USB: approx. 80 mm; PS2: approx. 32 mm

### Commercial data

country of origin	CZ
customs tariff number	85389099
minimum order quantity	1