

**M8 FEMALE 0°**

PUR 3x0.25 shielded 10m

M8


Female straight

3-pole, shielded

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[\*\*Link to Product\*\*](#)**Illustration**

# Female

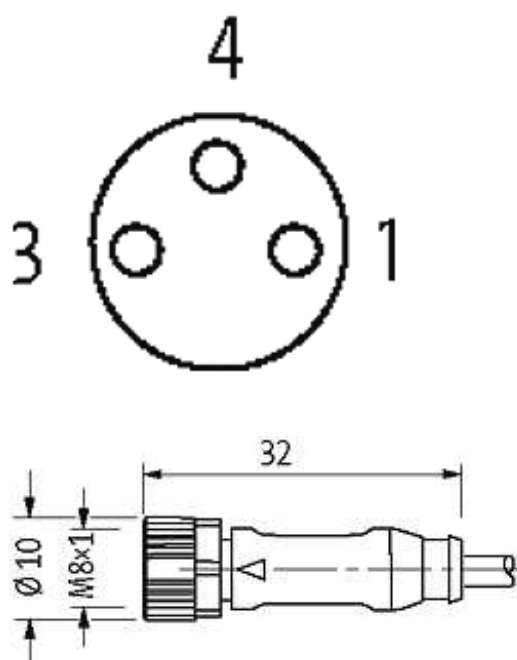

Product may differ from Image

## Form

Form	08045
------	-------

## Cables

Cable number	707
No./diameter of wires	3 × 0.25 mm <sup>2</sup>
Wire isolation	PP (br, bl, bk)
C-track properties	2 Mio.
Torsion	± 30 °/m
Jacket Color	black
Shore hardness outer jacket	89 ± 5A
Material (jacket)	PUR (UL/CSA)
Outer Ø	approx. 4.8 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-50...+80 °C
Temperature range (mobile)	-25...+80 °C
Shielded	yes

## Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 3 A
Locking of ports	Screw thread M8 × 1 mm (recommended torque 0.4 Nm) self-securing

Protection	IP66K, IP67 inserted and tightened (EN 60529)
------------	---

**Commercial data**

country of origin	PL
-------------------	----

customs tariff number	85444290
-----------------------	----------

minimum order quantity	1
------------------------	---