

**M8 FEMALE 90° , SHIELDED**


PUR 3x0.25 shielded 3m


M8

Female 90°

3-pole, shielded

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

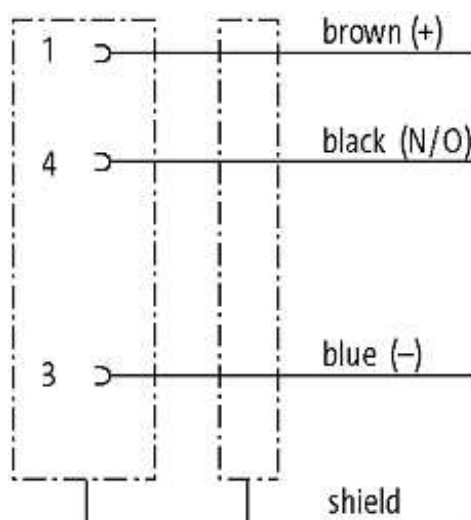[Link to Product](#)**Illustration**

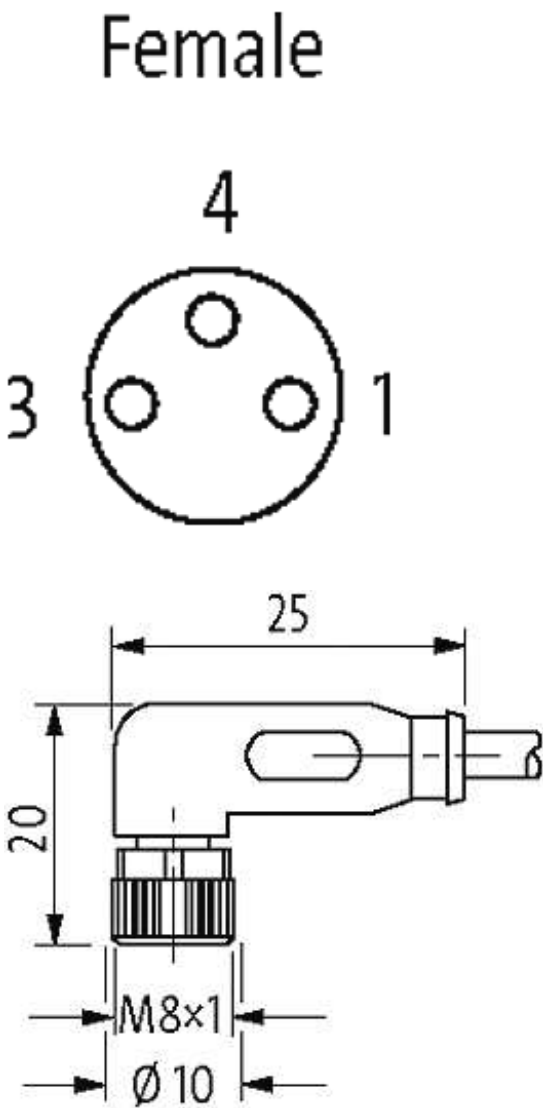

Product may differ from Image

Form	
Form	08085
Cables	
Cable number	707
No./diameter of wires	3 × 0.25 mm²
Wire isolation	PP (br, bl, bk)
C-track properties	2 Mio.
Torsion	± 30 °/m
Jacket Color	black
Shore hardness outer jacket	89 ± 5A
Material (jacket)	PUR (UL/CSA)
Outer Ø	approx. 4.8 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-50...+80 °C

Temperature range (mobile)	-25...+80 °C
----------------------------	--------------

Shielded	yes
----------	-----

**Technical Data**

Operating voltage	max. 60 V AC/DC
-------------------	-----------------

Operating current per contact	max. 3 A
-------------------------------	----------

Locking of ports	Screw thread M8 × 1 mm (recommended torque 0.4 Nm) self-securing
------------------	--

Protection	IP66K, IP67 inserted and tightened (EN 60529)
------------	---

**Commercial data**

country of origin	PL
-------------------	----

customs tariff number	85444290
-----------------------	----------

minimum order quantity	1
------------------------	---