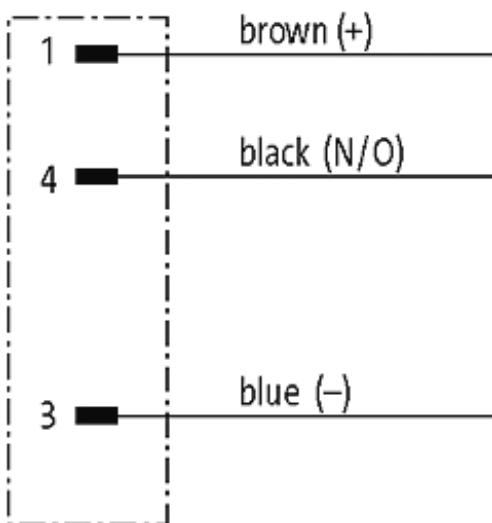


**M8 male 0° snap-in with cable**



PUR 3x0.25 ye UL/CSA+robot+drag chain 10m

M8  
Male straight  
3-pole  
Snap In

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

**Link to Product****Illustration**

Male

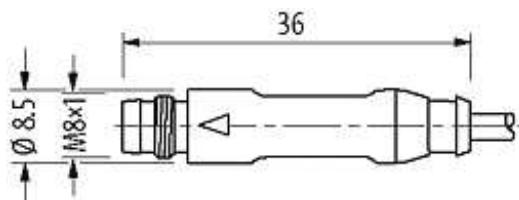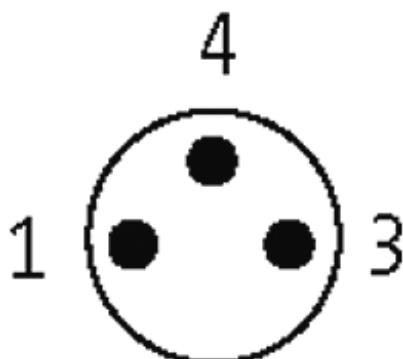

Product may differ from Image

### Approvals



\* only for products with UL/CSA approved cable

### Form

Form 08161

### Cables

Cable number	050
No./diameter of wires	3 × 0.25 mm <sup>2</sup>
Wire isolation	PP (br, bl, bk)
C-track properties	10 Mio.
Torsion	1 Mio. ± 360 °/m
Jacket Color	yellow
Shore hardness outer jacket	58 ± 3D
Material (jacket)	PUR (UL/CSA), welding spark res.
Outer Ø	approx. 4.3 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-40...+90 °C

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

Temperature range (mobile) -25...+90 °C

### General data

Temperature range -25...+85 °C, depending on cable quality

### Technical Data

Operating voltage max. 60 V AC/DC

Operating voltage (only UL listed) max. 30 V AC/DC

Operating current per contact max. 4 A

Locking of ports Snap In

Protection IP65

Locking material PUR

### Commercial data

country of origin DE

customs tariff number 85444290

minimum order quantity 1