

M8 male 0° snap-in with cable

PVC 3x0.25 bk UL/CSA 5m


M8

Male straight

3-pole

Snap In


Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

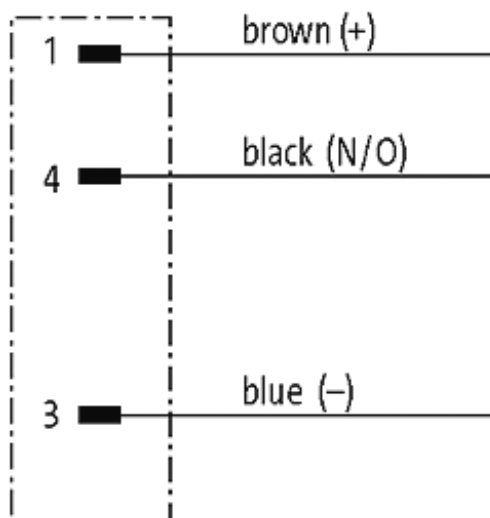[Link to Product](#)**Illustration**



Product may differ from Image

Approvals

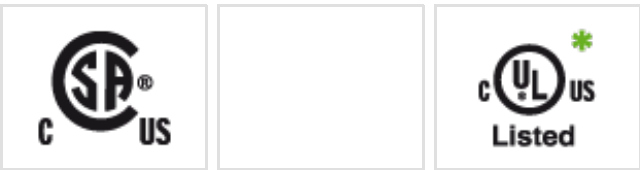

* only for products with UL/CSA approved cable

Form

Form 08161

Cables

| | |
|-----------------------------|--------------------------|
| Cable number | 610 |
| No./diameter of wires | 3 × 0.25 mm ² |
| Wire isolation | PVC (br, bl, bk) |
| Jacket Color | black |
| Shore hardness outer jacket | 85 ± 5A |
| Material (jacket) | PVC (UL/CSA) |
| Outer Ø | approx. 4.5 mm |
| Bend radius (fixed) | 5 × outer Ø |
| Bend radius (moving) | 10 × outer Ø |
| Temperature range (fixed) | -30...+80 °C |
| Temperature range (mobile) | -5...+80 °C |

General data

Temperature range -25...+85 °C, depending on cable quality

Technical Data

Operating voltage max. 60 V AC/DC

Operating voltage (only UL listed) max. 30 V AC/DC

Operating current per contact max. 4 A

Locking of ports Snap In

Protection IP65

Locking material PUR

Commercial data

country of origin DE

customs tariff number 85444290

minimum order quantity 1