

**M8 MALE SNAP-IN 0°**

PVC 4x0.25 black 7.5m


M8

Male straight


4-pole

Snap In

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

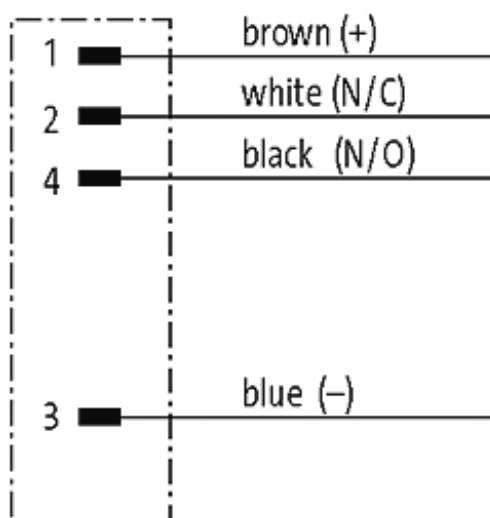
[\*\*Link to Product\*\*](#)**Illustration**

# Male

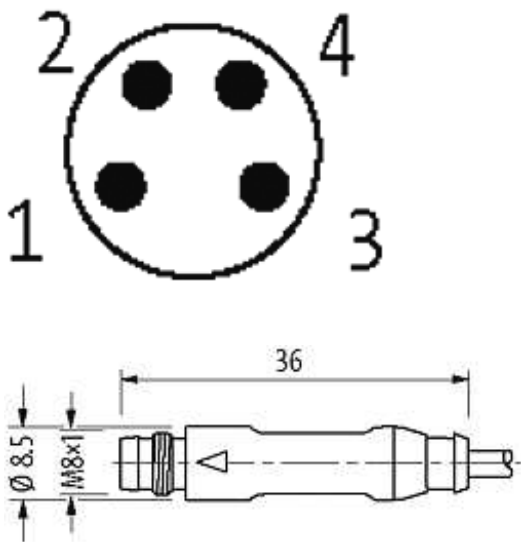

Product may differ from Image

### Approvals

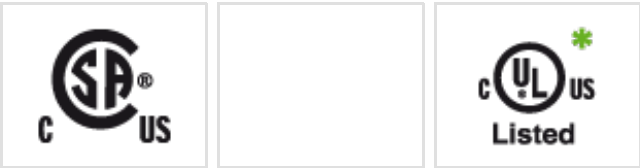

\* only for products with UL/CSA approved cable

### Form

Form 08171

### Cables

|                             |                          |
|-----------------------------|--------------------------|
| Cable number                | 611                      |
| No./diameter of wires       | 4 × 0.25 mm <sup>2</sup> |
| Wire isolation              | PVC (br, wh, bl, bk)     |
| Jacket Color                | black                    |
| Shore hardness outer jacket | 85 ± 5A                  |
| Material (jacket)           | PVC (UL/CSA)             |
| Outer Ø                     | approx. 4.8 mm           |
| Bend radius (fixed)         | 5 × outer Ø              |
| Bend radius (moving)        | 10 × outer Ø             |
| Temperature range (fixed)   | -30...+80 °C             |
| Temperature range (mobile)  | -5...+80 °C              |

### General data

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

Temperature range -25...+85 °C, depending on cable quality

**Technical Data**

Operating voltage max. 30 V AC/DC

Operating voltage (only UL listed) max. 30 V AC/DC

Operating current per contact max. 4 A

Locking of ports Snap In

Protection IP65

Locking material PUR

**Commercial data**

country of origin DE

customs tariff number 85444290

minimum order quantity 1