

**M8 MALE SNAP-IN 0°**

PUR 4x0.25 black UL/CSA, drag ch 7.5m


M8

Male straight


4-pole

Snap In

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

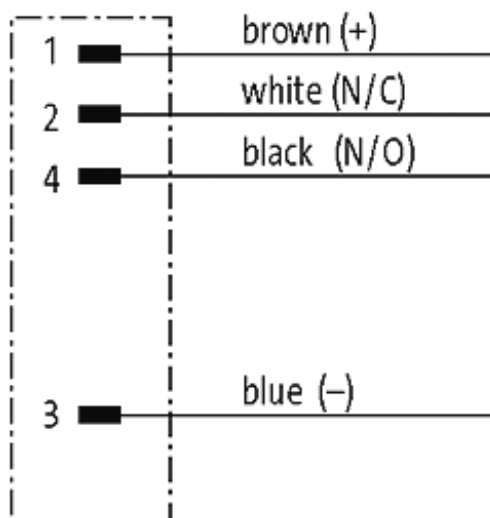
[\*\*Link to Product\*\*](#)**Illustration**

# Male

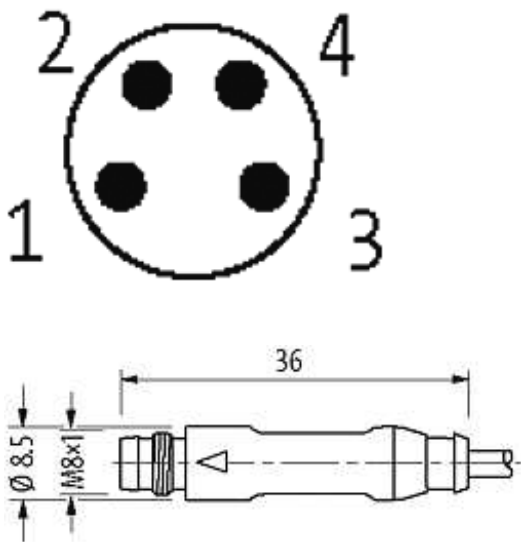

Product may differ from Image

### Approvals

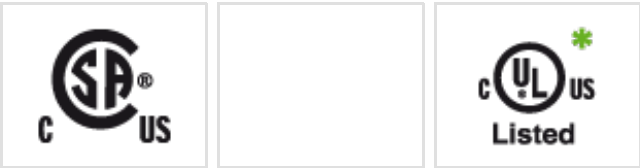

\* only for products with UL/CSA approved cable

### Form

Form 08171

### Cables

|                             |                     |
|-----------------------------|---------------------|
| Cable number                | 631                 |
| No./diameter of wires       | 4 × 0.25 mm²        |
| Wire isolation              | PP (br, wh, bl, bk) |
| C-track properties          | 5 Mio.              |
| Torsion                     | 2 Mio. ± 180°/m     |
| Jacket Color                | black               |
| Shore hardness outer jacket | 90 ± 5A             |
| Material (jacket)           | PUR (UL/CSA)        |
| Outer Ø                     | approx. 4.7 mm      |
| Bend radius (fixed)         | 5 × outer Ø         |
| Bend radius (moving)        | 10 × outer Ø        |
| Temperature range (fixed)   | -40...+80 °C        |

Temperature range (mobile) -25...+80 °C

#### General data

Temperature range -25...+85 °C, depending on cable quality

#### Technical Data

Operating voltage max. 30 V AC/DC

Operating voltage (only UL listed) max. 30 V AC/DC

Operating current per contact max. 4 A

Locking of ports Snap In

Protection IP65

Locking material PUR

#### Commercial data

country of origin DE

customs tariff number 85444290

minimum order quantity 1