

**M8 FEMALE SNAP-IN 0°**

PUR 3x0.25 black 10m


M8


Male straight

3-pole

Snap In

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

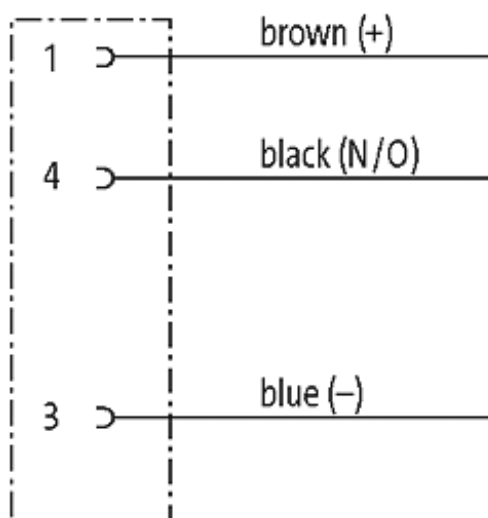[\*\*Link to Product\*\*](#)**Illustration**

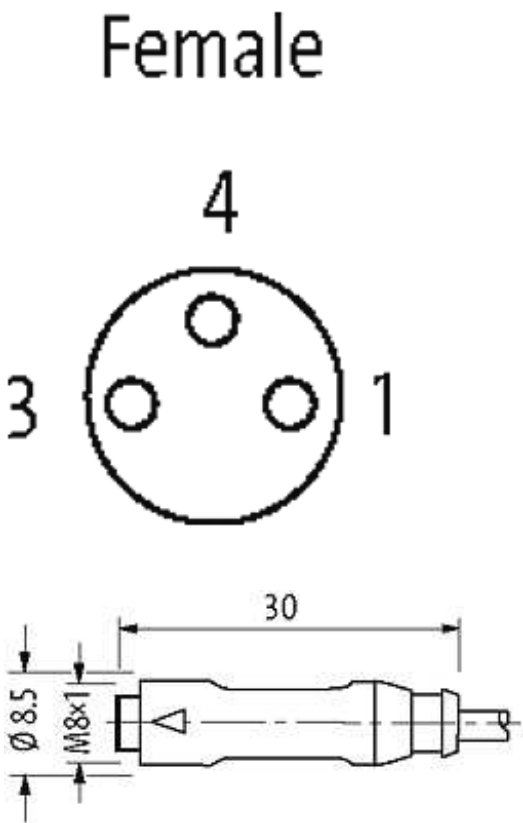

Product may differ from Image

Approvals



\* only for products with UL/CSA approved cable

Form

Form 08201

Cables

|                             |                          |
|-----------------------------|--------------------------|
| Cable number                | 620                      |
| No./diameter of wires       | 3 × 0.25 mm <sup>2</sup> |
| Wire isolation              | PVC (br, bl, bk)         |
| C-track properties          | 2 Mio.                   |
| Jacket Color                | black                    |
| Shore hardness outer jacket | 85 ± 5A                  |
| Material (jacket)           | PUR/PVC (UL/CSA)         |
| Outer Ø                     | approx. 4.5 mm           |
| Bend radius (fixed)         | 10 × outer Ø             |
| Bend radius (moving)        | 15 × outer Ø             |
| Temperature range (fixed)   | -30...+80 °C             |

Temperature range (mobile) -5...+80 °C

**General data**

Temperature range -25...+85 °C, depending on cable quality

**Technical Data**

Operating voltage max. 60 V AC/DC

Operating voltage (only UL listed) max. 30 V AC/DC

Operating current per contact max. 4 A

Locking of ports Snap In

Protection IP65

Locking material PUR

**Commercial data**

country of origin DE

customs tariff number 85444290

minimum order quantity 1