

stay connected

## M8 FEMALE 90° SNAP-IN


PUR 3x0.25 YELLOW, 7.5m

M8 Female 90° 3-pole Snap In

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

### **Link to Product**


## Illustration

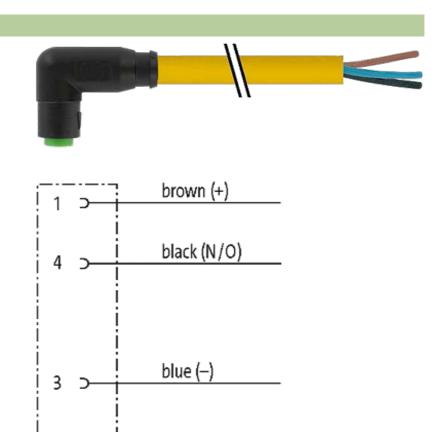




stay connected

# **Female**





Product may differ from Image

#### **Approvals**





\* only for products with UL/CSA approvaled cable

Form	
Form	08241
Cables	
Cable number	020
No./diameter of wires	$3 \times 0.25 \text{ mm}^2$
Wire isolation	PVC (br, bl, bk)
C-track properties	2 Mio.
Jacket Color	yellow

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16



sta	v cor	nnec	ted
2001	,		

Shore hardness outer jacket	85 ± 5A	
Material (jacket)	PUR/PVC (UL/CSA)	
Outer Ø	approx. 4.5 mm	
Bend radius (fixed)	10 × outer Ø	
Bend radius (moving)	15 × outer Ø	
Temperature range (fixed)	-30+80 °C	
Temperature range (mobile)	-5+80 °C	
General data		
Temperature range	-25+85 °C, depending on cable quality	
Technical Data		
Operating voltage	max. 60 V AC/DC	
Operating current per contact	max. 4 A	
Locking of ports	Snap In	
Protection	IP65	
Commercial data		
country of origin	DE	
customs tariff number	85444290	
minimum order quantity	1	