

M8 female 90° snap-in with cable

PVC 3x0.25 gy UL/CSA 8m


M8

Female 90°



3-pole

Snap In

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

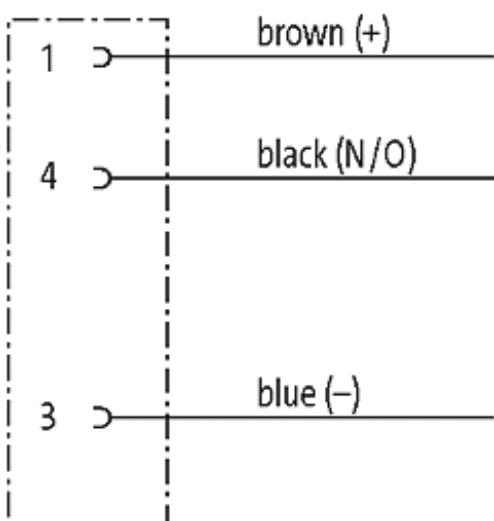Link to Product**Illustration**

Female

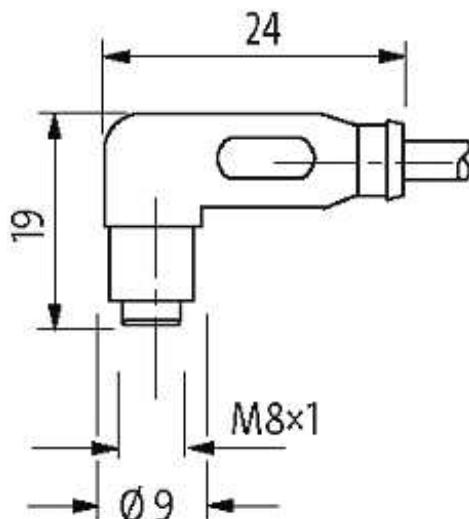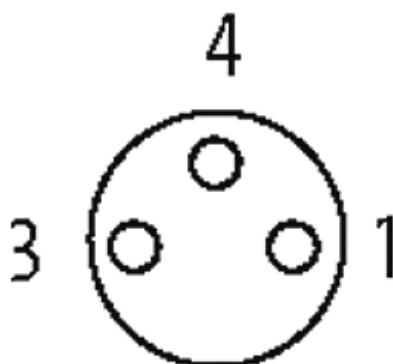

Product may differ from Image

Approvals



* only for products with UL/CSA approved cable

Form

Form 08241

Cables

Cable number 210

No./diameter of wires 3 x 0.25 mm²

Wire isolation PVC (br, bl, bk)

Jacket Color gray

Shore hardness outer jacket 85 ± 5A

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/16

Material (jacket)	PVC (UL/CSA)
Outer Ø	approx. 4.5 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+80 °C

General data

Temperature range	-25...+85 °C, depending on cable quality
-------------------	--

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Snap In
Protection	IP65

Commercial data

country of origin	DE
customs tariff number	85444290
minimum order quantity	1