

**M8 FEMALE 90° SNAP-IN**

PUR 4x0.25 YELLOW, 7.5m

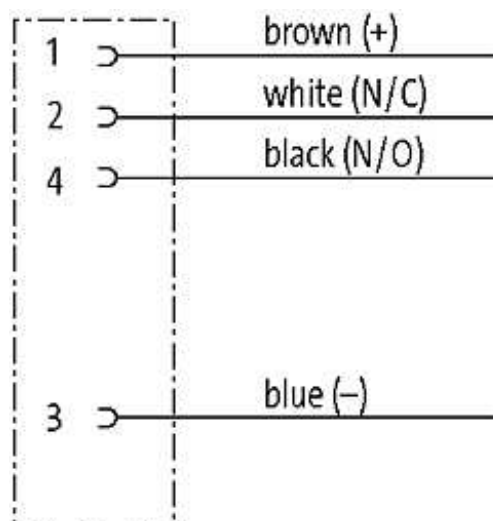
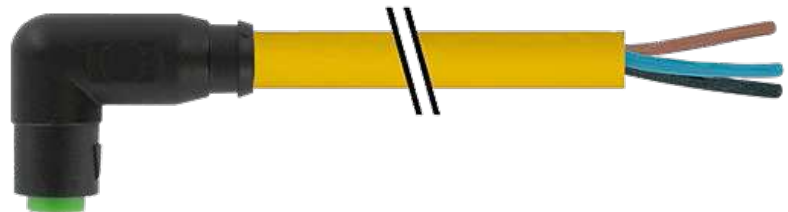
M8

Female 90°

4-pole

Snap In

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[\*\*Link to Product\*\*](#)**Illustration**

# Female



Product may differ from Image

Approvals



\* only for products with UL/CSA approved cable

Form

Form 08261

Cables

|                       |                      |
|-----------------------|----------------------|
| Cable number          | 021                  |
| No./diameter of wires | 4 × 0.25 mm²         |
| Wire isolation        | PVC (br, wh, bl, bk) |
| C-track properties    | 2 Mio.               |
| Jacket Color          | yellow               |

|                             |                  |
|-----------------------------|------------------|
| Shore hardness outer jacket | 85 ± 5A          |
| Material (jacket)           | PUR/PVC (UL/CSA) |
| Outer Ø                     | approx. 4.8 mm   |
| Bend radius (fixed)         | 10 × outer Ø     |
| Bend radius (moving)        | 15 × outer Ø     |
| Temperature range (fixed)   | -30...+80 °C     |
| Temperature range (mobile)  | -5...+80 °C      |

**General data**

|                   |  |
|-------------------|--|
| Temperature range | -25...+85 °C, depending on cable quality |
|-------------------|--|

**Technical Data**

|                               |                 |
|-------------------------------|-----------------|
| Operating voltage             | max. 30 V AC/DC |
| Operating current per contact | max. 4 A        |
| Locking of ports              | Snap In         |
| Protection                    | IP65            |

**Commercial data**

|                        |          |
|------------------------|----------|
| country of origin      | DE       |
| customs tariff number  | 85444290 |
| minimum order quantity | 1        |