

**M8 female 90° snap-in with cable LED**

PVC 3x0.25 gy UL/CSA 7,5m

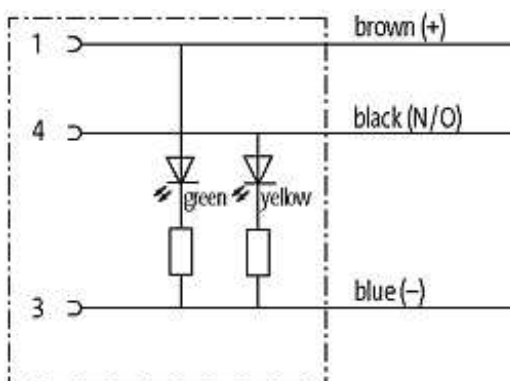
M8

Female 90° with LED

3-pole with 2 × LED (PNP)

Snap In

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

**[Link to Product](#)****Illustration**

# Female



Product may differ from Image

### Approvals



\* only for products with UL/CSA approved cable

### Form

Form 08281

### Cables

|                             |                  |
|-----------------------------|------------------|
| Cable number                | 210              |
| No./diameter of wires       | 3 × 0.25 mm²     |
| Wire isolation              | PVC (br, bl, bk) |
| Jacket Color                | gray             |
| Shore hardness outer jacket | 85 ± 5A          |

|                            |                |
|----------------------------|----------------|
| Material (jacket)          | PVC (UL/CSA)   |
| Outer Ø                    | approx. 4.5 mm |
| Bend radius (fixed)        | 5 × outer Ø    |
| Bend radius (moving)       | 10 × outer Ø   |
| Temperature range (fixed)  | -30...+80 °C   |
| Temperature range (mobile) | -5...+80 °C    |

**General data**

|                   |  |
|-------------------|--|
| Temperature range | -25...+85 °C, depending on cable quality |
|-------------------|--|

**Technical Data**

|                               |               |
|-------------------------------|---------------|
| Operating voltage             | 24 V DC ±25 % |
| Operating current per contact | max. 4 A      |
| Locking of ports              | Snap In       |
| Protection                    | IP65          |

**Commercial data**

|                        |          |
|------------------------|----------|
| country of origin      | DE       |
| customs tariff number  | 85444290 |
| minimum order quantity | 1        |