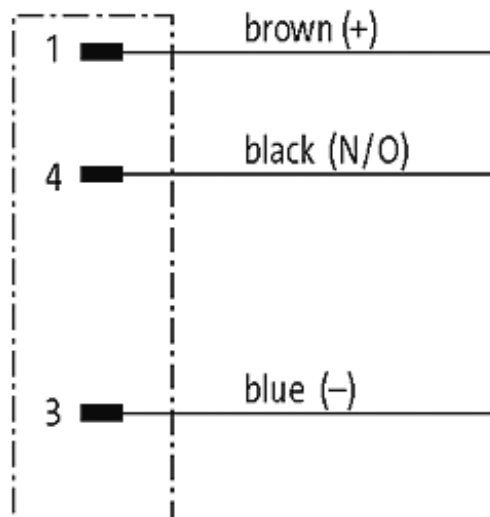
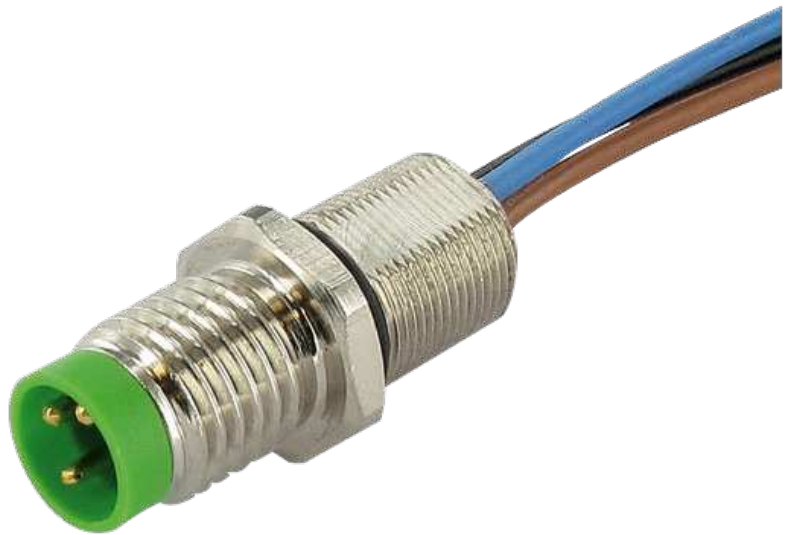




**M8 male receptacle front mount incl. nut**

wires PP 3x0,25 1m

Front mounting  
Mounting nut  
Flange M8 male  
with multi-strand wire  
3-pole

[Link to Product](#)**Illustration**

## Male

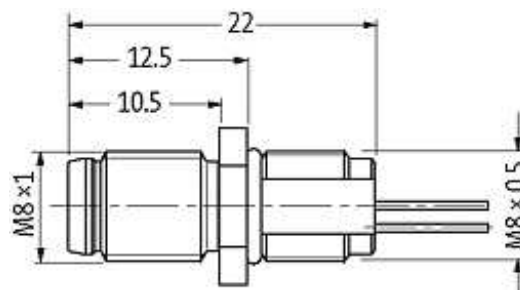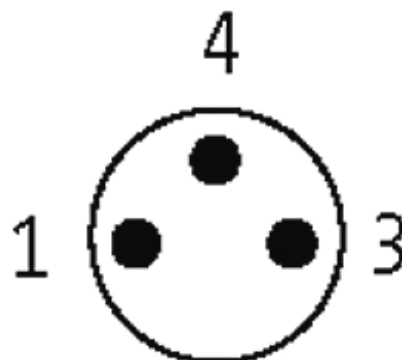

Product may differ from Image

**Form**

Form 08553

**Cables**

|                             |                          |
|-----------------------------|--------------------------|
| Cable number                | 970                      |
| No./diameter of wires       | 3 × 0.25 mm <sup>2</sup> |
| Wire isolation              | PP (br, bk, bl)          |
| Shore hardness outer jacket | 70 ± 5D                  |
| Outer Ø                     | approx. 1.25 mm          |
| Bend radius (fixed)         | 5 × outer Ø              |
| Bend radius (moving)        | 10 × outer Ø             |
| Temperature range (fixed)   | -40...+80 °C             |
| Temperature range (mobile)  | -25...+80 °C             |

**General data**

Temperature range -25...+85 °C

**Technical Data**

|                               |  |
|-------------------------------|--|
| Operating voltage             | max. 60 V AC/DC  |
| Operating current per contact | max. 4 A   |
| Locking of ports              | Screw thread M8 × 1 mm (recommended torque 0.4 Nm) self-securing |
| Protection                    | IP66K, IP67 inserted and tightened (EN 60529)                    |

**Commercial data**

|                        |          |
|------------------------|----------|
| country of origin      | DE       |
| customs tariff number  | 85444290 |
| minimum order quantity | 1        |