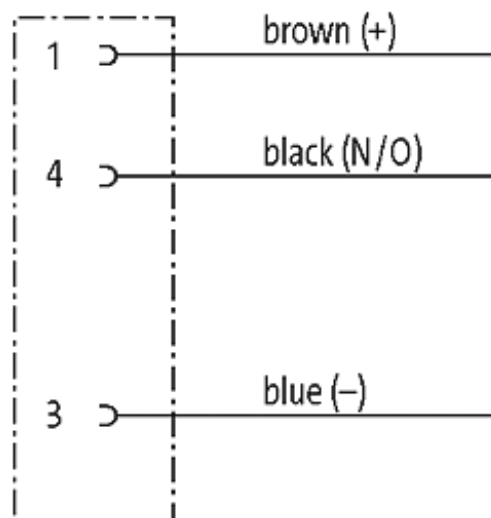




**M8 FEMALE FLANGE PLUG REAR MOUNT**

TPE wires 3x0.25 1m

Flange M8 female  
4-pole  
3-pole  
Rear mounting  
Mounting nut  
with multi-strand wire


[Link to Product](#)**Illustration**

# Female

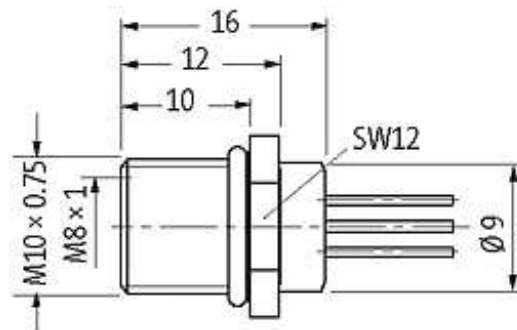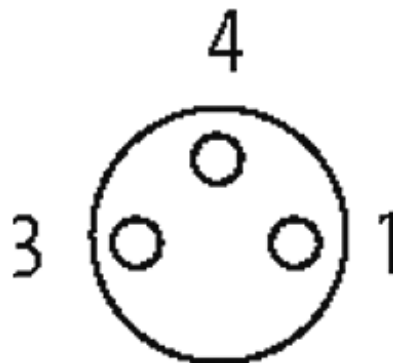

1	↷	brown (+)
2	↷	white (N/C)
4	↷	black (N/O)
3	↷	blue (-)

# Female

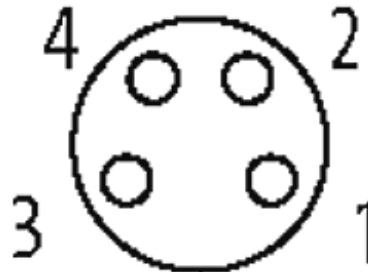

Product may differ from Image

## Form

Form 08575

## Cables

Cable number	970
No./diameter of wires	3 × 0.25 mm <sup>2</sup>
Wire isolation	PP (br, bk, bl)
Shore hardness outer jacket	70 ± 5D
Outer Ø	approx. 1.25 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-25...+80 °C

## General data

Temperature range -25...+85 °C

## Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread M8 × 1 mm (recommended torque 0.4 Nm) self-securing
Protection	IP66K, IP67 inserted and tightened (EN 60529)

## Commercial data

country of origin	DE
customs tariff number	85444290
minimum order quantity	1