

**M8 MALE 0° , SHIELDED**


PVC 4X0.34 shielded GRAY, UL,CSA 3m

M8


Male straight

4-pole, shielded

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

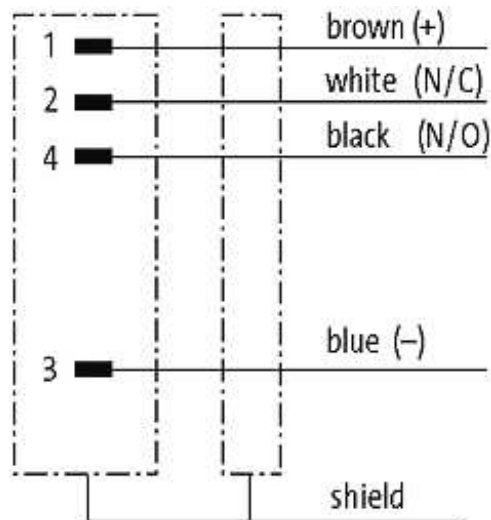**[Link to Product](#)****Illustration**

# Male

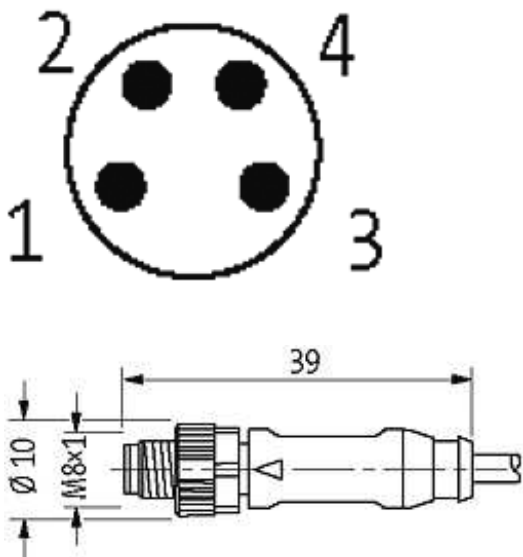

Product may differ from Image

### Approvals



### Form

Form 08711

### Cables

Cable number	201
No./diameter of wires	4 × 0.34 mm²
Wire isolation	PVC (br, wh, bl, bk)
Jacket Color	gray
Shore hardness outer jacket	85 ± 5A
Material (jacket)	PVC (UL/CSA)
Outer Ø	approx. 5.3 mm
Bend radius (fixed)	10 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+80 °C
Shielded	yes

### General data

Temperature range -25...+85 °C, depending on cable quality

**Technical Data**

Operating voltage max. 30 V AC/DC

Operating current per contact max. 4 A

Locking of ports Screw thread M8 × 1 mm (recommended torque 0.4 Nm) self-securing

Protection IP66K, IP67 inserted and tightened (EN 60529)

**Commercial data**

country of origin DE

customs tariff number 85444290

minimum order quantity 1