

**M8 male 90° shielded with cable, Ethercat**

PUR 1x4xAWG26 shielded gn UL/CSA+drag chain 3m

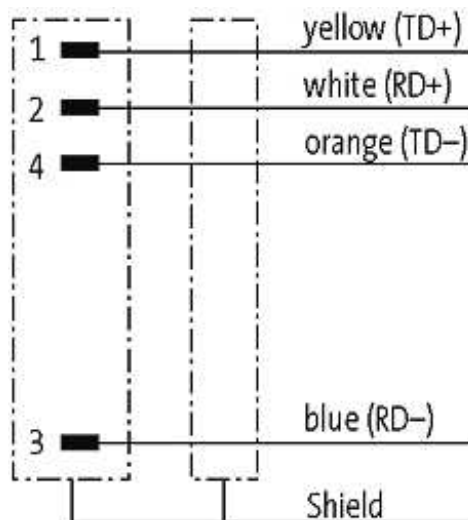
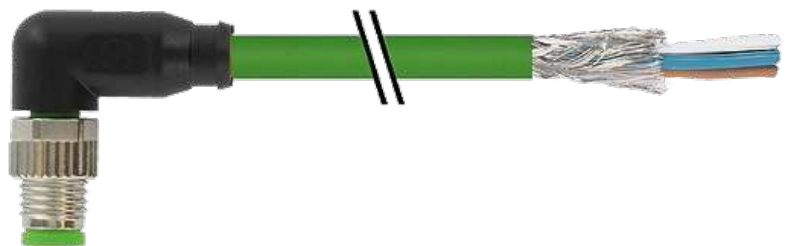
M8

Male 90°

Ethernet CAT 5e

4-pole, shielded

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.


[\*\*Link to Product\*\*](#)**Illustration**

Male



Product may differ from Image

Approvals



More Info



Form

Form 08821

Cables

|                             |                     |
|-----------------------------|---------------------|
| Cable number                | 791                 |
| No./diameter of wires       | 1 × 4 × AWG26       |
| Wire isolation              | PE (wh, ye, bl, or) |
| C-track properties          | 5 Mio.              |
| Jacket Color                | green               |
| Shore hardness outer jacket | 85 ± 5A             |
| Material (jacket)           | PUR (UL/CSA)        |
| Outer Ø                     | approx. 4.9 mm      |
| Bend radius (fixed)         | 7.5 × outer Ø       |
| Bend radius (moving)        | 12 × outer Ø        |
| Temperature range (fixed)   | -20...+80 °C        |
| Temperature range (mobile)  | -20...+50 °C        |
| Shielded                    | yes                 |

General data

Temperature range -25...+85 °C, depending on cable quality

**Technical Data**

Operating voltage 30 V AC/DC

Operating current per contact max. 4 A

Locking of ports Screw thread M8 × 1 mm (recommended torque 0.4 Nm) self-securing

Protection IP66K, IP67 inserted and tightened (EN 60529)

**Commercial data**

country of origin DE

customs tariff number 85444290

minimum order quantity 1