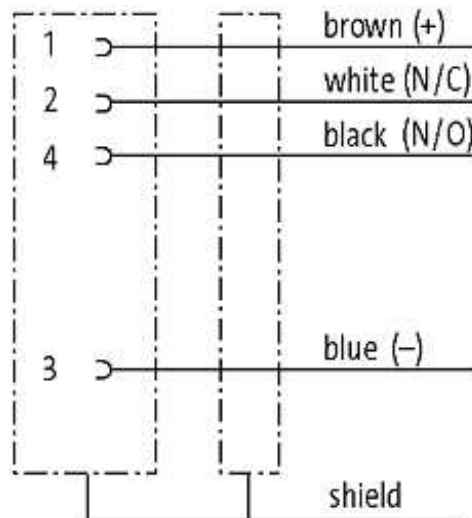


**M12 female receptacle shielded rear mount**

PUR-OB 4x0,34 shielded grey UL,CSA+drag chain 2m

Flange M12 female  
4-pole, shielded  
Rear mounting  
Mounting nut  
With open ended wires

Further cable lengths on request. The resistance to aggressive media should be individually tested for your application. Further details on request.


[Link to Product](#)**Illustration**

# Female



Product may differ from Image

## Approvals



## Form

Form 13611

## Cables

Cable number	241
No./diameter of wires	4 × 0.34 mm <sup>2</sup>
Wire isolation	PP (br, wh, bl, bk)
C-track properties	5 Mio.
Torsion	2 Mio. ± 30°/m
Jacket Color	gray
Shore hardness outer jacket	90 ± 5A
Material (jacket)	PUR (UL/CSA)
Outer Ø	approx. 5.3 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-40...+80 °C

Temperature range (mobile)	-25...+80 °C
----------------------------	--------------

Shielded	yes
----------	-----

**Technical Data**

Operating voltage	max. 60 V AC/DC
-------------------	-----------------

Operating current per contact	max. 4 A
-------------------------------	----------

Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
------------------	---

Protection	IP66K, IP67 inserted and tightened (EN 60529)
------------	---

**Commercial data**

country of origin	DE
-------------------	----

customs tariff number	85444290
-----------------------	----------

minimum order quantity	1
------------------------	---