

**M12 MALE 90° SHIELDED B CODED , INTERBUS**

PUR 3x2x0.25 shielded violet 5m

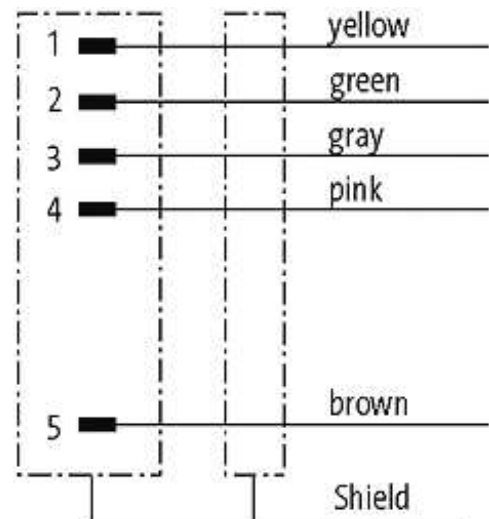
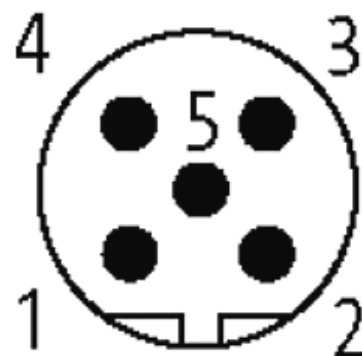
M12

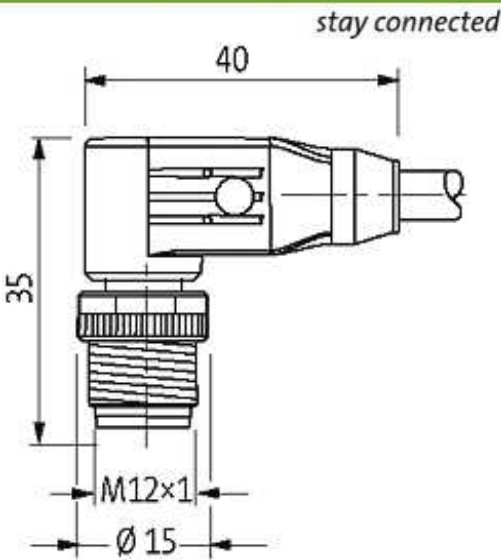
Male 90°

Interbus, B-coded

5-pole, shielded

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[\*\*Link to Product\*\*](#)**Illustration****Male**



Product may differ from Image

Approvals



More Info



Form

Form 14251

Cables

Cable number	799
No./diameter of wires	3 × 2 × AWG 24
Wire isolation	PE (br,wh,gr,pk,gn,ye)
C-track properties	2 Mio.
Jacket Color	violet
Shore hardness outer jacket	85 ± 5A
Material (jacket)	PUR
Outer Ø	approx. 7.7 mm
Bend radius (fixed)	10 × outer Ø
Bend radius (moving)	15 × outer Ø
Temperature range (fixed)	-40...+70 °C
Temperature range (mobile)	-20...+50 °C
Shielded	yes

General data

Temperature range -25...+85 °C, depending on cable quality

**Technical Data**

Operating voltage 60 V AC/DC

Operating current per contact max. 4 A

Locking of ports Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing

**Commercial data**

country of origin DE

customs tariff number 85444290

minimum order quantity 1