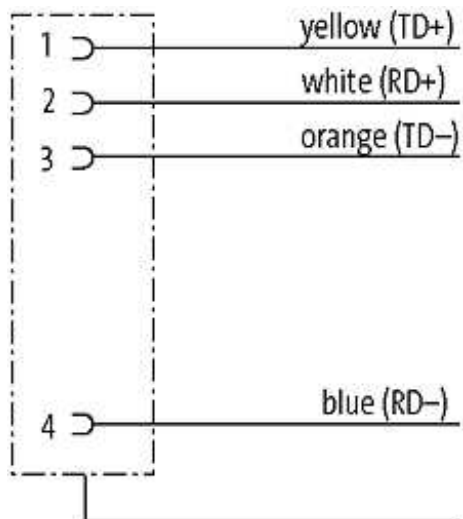




**M12 female receptacle D-cod. front mount**

wires TPE 4x0.34 0,2m

Flange M12 female  
D-coded, 4-pole, shielded  
with multi-strand wire  
Front mounting

**[Link to Product](#)****Illustration**

# Female

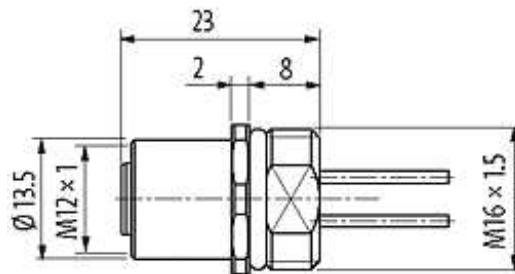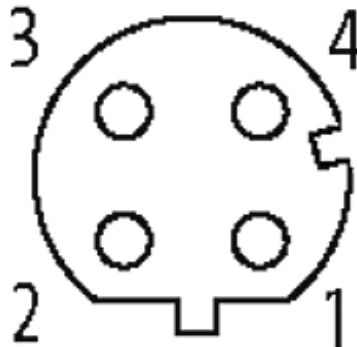

Product may differ from Image

## More Info



## Form

Form 14501

## Cables

Cable number	976
No./diameter of wires	4 × 0.34 mm <sup>2</sup>
Wire isolation	PE (wh, ye, bl, or)
C-track properties	2 Mio.
Shore hardness outer jacket	70 ± 5D
Outer Ø	approx. 1.25 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	15 × outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-20...+60 °C

## Technical Data

Operating voltage max. 250 V AC/DC

Operating current per contact	max. 4 A
Transfer parameters	CAT5, class D (ISO/IEC 11801:2002), (EN 50173-1)
Transfer rate	to 100 Mbit/s Full Duplex
Coding	M12, D-coded
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP66K, IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated

**Commercial data**

country of origin	DE
customs tariff number	85444290
minimum order quantity	1