

**M12 MALE,0° SHIELDED, D CODED, ETHERNET**

PUR 2x2xAWG22 shielded red UL,CSA+dragchain 3m


Ethernet CAT5

M12


Male straight

D-coded, 4-pole, shielded

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

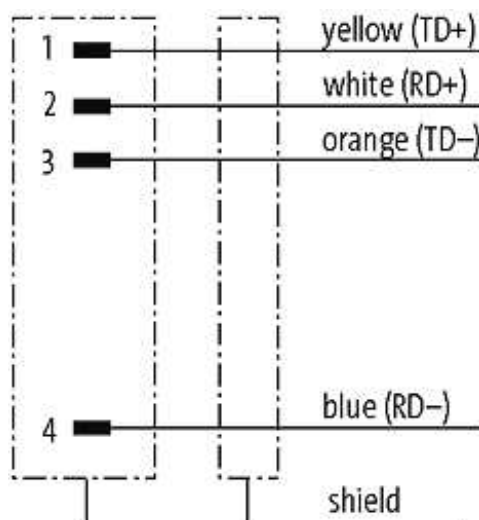
[\*\*Link to Product\*\*](#)**Illustration**

# Male

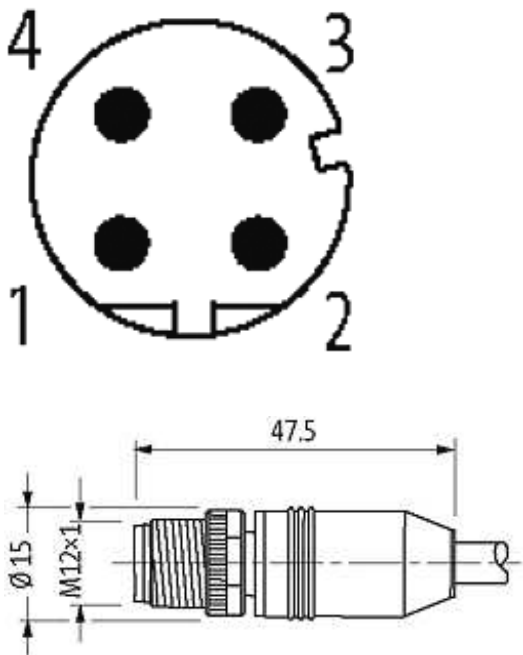

Product may differ from Image

## Approvals

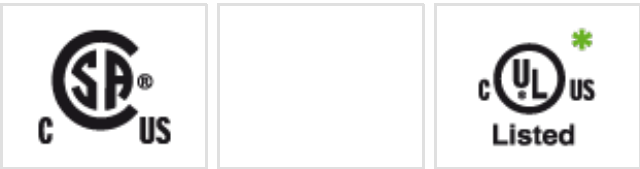

\* only for products with UL/CSA approved cable

## More Info



## Form

Form 14541

## Cables

|                             |                     |
|-----------------------------|---------------------|
| Cable number                | 792                 |
| No./diameter of wires       | 2 × 2 × AWG22       |
| Wire isolation              | PE (wh, ye, bl, or) |
| C-track properties          | 2 Mio.              |
| Jacket Color                | red                 |
| Shore hardness outer jacket | 90 ± 5A             |

|                            |                |
|----------------------------|----------------|
| Material (jacket)          | PUR (UL/CSA)   |
| Outer Ø                    | approx. 6.7 mm |
| Bend radius (fixed)        | 5 × outer Ø    |
| Bend radius (moving)       | 15 × outer Ø   |
| Temperature range (fixed)  | -40...+80 °C   |
| Temperature range (mobile) | -20...+60 °C   |
| Shielded                   | yes            |

#### General data

|                   |                                          |
|-------------------|------------------------------------------|
| Temperature range | -25...+85 °C, depending on cable quality |
|-------------------|------------------------------------------|

#### Technical Data

|                                    |                                                                   |
|------------------------------------|-------------------------------------------------------------------|
| Operating voltage                  | max. 60 V AC/DC                                                   |
| Operating voltage (only UL listed) | max. 30 V AC/DC                                                   |
| Operating current per contact      | max. 4 A                                                          |
| Transfer parameters                | CAT5, class D (ISO/IEC 11801:2002), (EN 50173-1)                  |
| Transfer rate                      | 10/100 Mbit/s full duplex                                         |
| Locking of ports                   | Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing |
| Compression gland                  | M12 (SW13)                                                        |
| Protection                         | IP66K, IP67 inserted and tightened (EN 60529)                     |
| Locking material                   | Zinc die casting, matte nickel plated                             |
| Material                           | PUR                                                               |

#### Commercial data

|                        |          |
|------------------------|----------|
| country of origin      | DE       |
| customs tariff number  | 85444290 |
| minimum order quantity | 1        |