


M12 FEMALE 0° 6POL, ,CUBE67-SAFETY

PUR 4x0,5 + 2x0,5 shielded YELLOW, 1.5m


M12


Female straight

Cube67, 6-pole

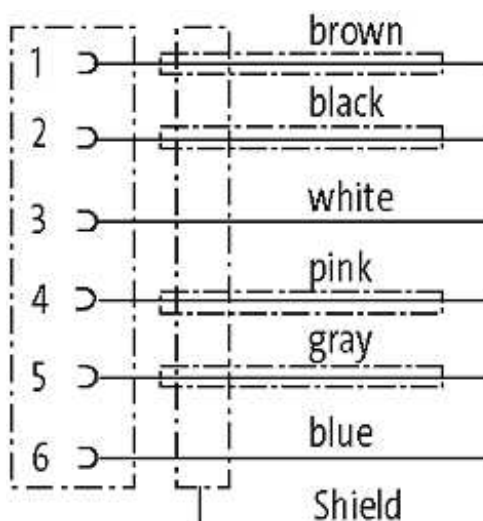[**Link to Product**](#)**Illustration**

Female

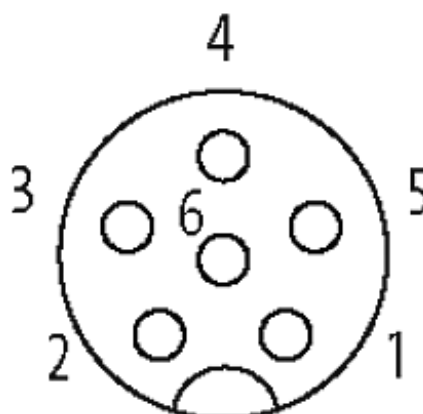

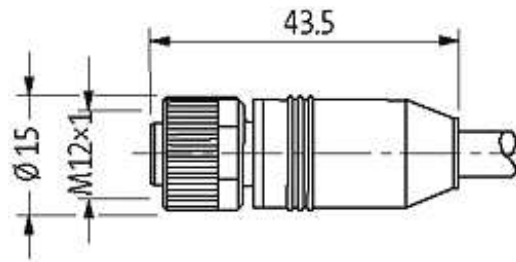

Product may differ from Image

Approvals



More Info

Cube67

Form

Form 15101

Cables

Cable number	138
No./diameter of wires	4×0.5 + 2×0.5 mm ²
Wire isolation	PP (br, wh, bl, bk, gr, pk)
C-track properties	5 Mio.
Jacket Color	yellow
Shore hardness outer jacket	85 ± 5A
Material (jacket)	PUR
Outer Ø	approx. 8.0 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+80 °C
Shielded	yes

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP66K, IP67 inserted and tightened (EN 60529)

Commercial data

country of origin	DE
customs tariff number	85444290

minimum order quantity

1