

**M12 MALE 0°**

PUR 12x0,14 black drag ch AIN 1.5m

M12

Male straight


12-pole

Art.-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request. Further cable lengths on request.

**[Link to Product](#)****Illustration**

|    |   |           |
|----|---|-----------|
| 1  | ■ | brown     |
| 2  | ■ | blue      |
| 3  | ■ | white     |
| 4  | ■ | green     |
| 5  | ■ | pink      |
| 6  | ■ | yellow    |
| 7  | ■ | black     |
| 8  | ■ | gray      |
| 9  | ■ | red       |
| 10 | ■ | violet    |
| 11 | ■ | gray/pink |
| 12 | ■ | red/blue  |

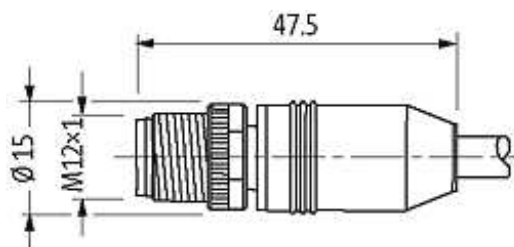

Product may differ from Image

**Approvals**

**Form**

|      |       |
|------|-------|
| Form | 19001 |
|------|-------|

**Cables**

|                             |                                                         |
|-----------------------------|---------------------------------------------------------|
| Cable number                | 705                                                     |
| No./diameter of wires       | 12 × 0.14 mm <sup>2</sup>                               |
| Wire isolation              | PP (br, bl, wh, gn, pk, ye, bk, gr, rd, vi, grpk, rdbl) |
| C-track properties          | 2 Mio.                                                  |
| Torsion                     | ± 180°/m                                                |
| Jacket Color                | black                                                   |
| Shore hardness outer jacket | 95 ± 5A                                                 |
| Material (jacket)           | PUR (UL/CSA)                                            |
| Outer Ø                     | approx. 6.0 mm                                          |
| Bend radius (fixed)         | 5 × outer Ø                                             |
| Bend radius (moving)        | 10 × outer Ø                                            |
| Temperature range (fixed)   | -40...+85 °C                                            |
| Temperature range (mobile)  | -25...+85 °C                                            |

**General data**

|                   |                                          |
|-------------------|------------------------------------------|
| Temperature range | -25...+85 °C, depending on cable quality |
|-------------------|------------------------------------------|

**Technical Data**

|                               |                                                                   |
|-------------------------------|-------------------------------------------------------------------|
| Operating voltage             | max. 30 V AC/DC                                                   |
| Operating current per contact | max. 1.5 A                                                        |
| Locking of ports              | Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing |
| Protection                    | IP66K, IP67 inserted and tightened (EN 60529)                     |

**Commercial data**

|                        |          |
|------------------------|----------|
| country of origin      | DE       |
| customs tariff number  | 85444290 |
| minimum order quantity | 1        |