

M23 FEMALE, 90° 12 POLE

PUR 4X0.34+3X0.75 GRAY, drag ch 10m

M23

Female 90°


12-pole

7-pole used

[Link to Product](#)**Illustration**

1	white
2	green
3	yellow
4	gray
11	brown 0.75 mm ²
9	blue 0.75 mm ²
12	green/yellow 0.75 mm ²

Female

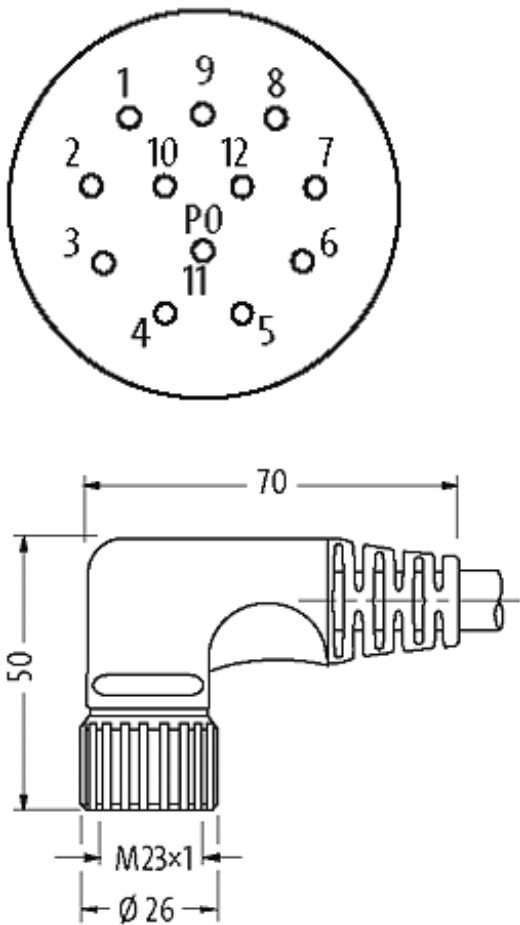

Product may differ from Image

Form	
Form	23111
Cables	
Cable number	333
No./diameter of wires	4×0.34 + 3×0.75 mm²
Wire isolation	PVC
C-track properties	2 Mio.
Jacket Color	gray
Shore hardness outer jacket	85 ± 5A
Material (jacket)	PUR/PVC
Outer Ø	approx. 8.5 mm
Bend radius (fixed)	10 × outer Ø
Bend radius (moving)	12 × outer Ø
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+80 °C
Technical Data	

Operating voltage	max. 125 V AC/DC
Operating current per contact	max. 7.5 A
Locking of ports	Screw thread M23 × 1 mm
Protection	IP67 inserted and tightened (EN 60529)

Commercial data

country of origin	QU
customs tariff number	85444290
minimum order quantity	1