

M23 female 90° with cable

PUR 8x0.34+3x0.75 gy+drag chain 10m

M23

Female 90°

19-pole

11-pole used


for 4-way distribution boxes, 5-pole

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

15	white
7	gray/pink
5	green
4	red/blue
	yellow
16	white/green
8	gray
3	brown/green
14	brown 1.0 mm²
19	blue 1.0 mm²
6	green/yellow 1.0 mm²
12	

Female

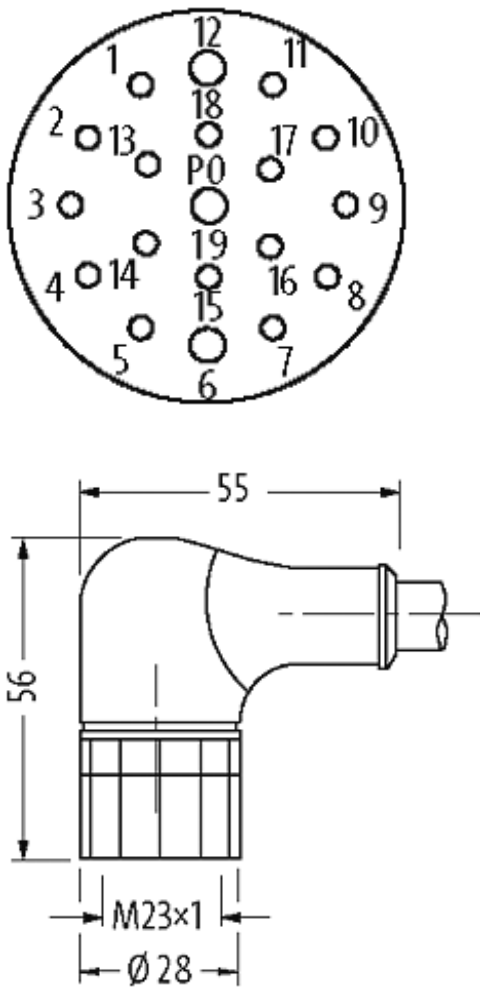

Product may differ from Image

Cables	
Cable number	363
No./diameter of wires	8×0.34 + 3×0.75 mm²
C-track properties	2 Mio.
Jacket Color	gray
Shore hardness outer jacket	85 ± 5A
Material (jacket)	PUR/PVC
Outer Ø	approx. 9.1 mm
Bend radius (fixed)	10 × outer Ø
Bend radius (moving)	12 × outer Ø
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+70 °C
General data	
Temperature range	-25...+85 °C, depending on cable quality
Technical Data	

Operating current per contact max. 7.5 A

Commercial data

country of origin DE

customs tariff number 85444290

minimum order quantity 1