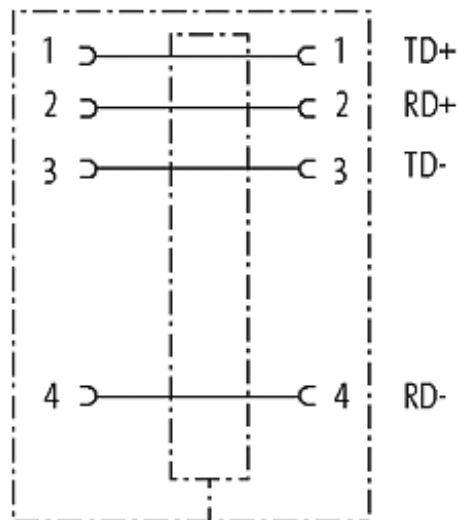


M12 GENDER-CHANGER,FEMALE/FEMALE 4 POLE D CODED

For Ethernet


Ethernet CAT5
Control cabinet entry system M12
M12 (female/female)
D-coded, 4-pole, shielded


[Link to Product](#)**Illustration**

Female



Female



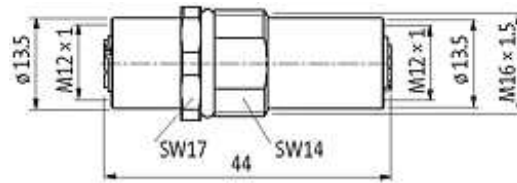

Product may differ from Image

More Info



Form

Form 44611

General data

Temperature range -25...+85 °C

Technical Data

Operating voltage max. 60 V AC/DC

Operating current per contact max. 4 A

Transfer parameters CAT5, class D (ISO/IEC 11801:2002), (EN 50173-1)

Transfer rate 10/100 Mbit/s full duplex

Coding M12, D-coded

Locking of ports Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing

Protection IP66K, IP67 inserted and tightened (EN 60529)

Material CuZn, nickel plated

Commercial data

country of origin DE

customs tariff number 85369010

minimum order quantity 1