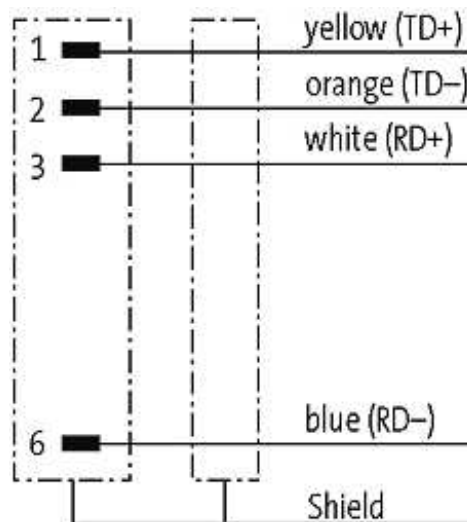


RJ45 male 45° up, shielded with cable, Ethernet

PUR 1x4xAWG22 shielded gn UL/CSA+robot 15m


Ethernet CAT 5e
Male RJ45 45° on top
4-pole, shielded

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**


Male

6 321

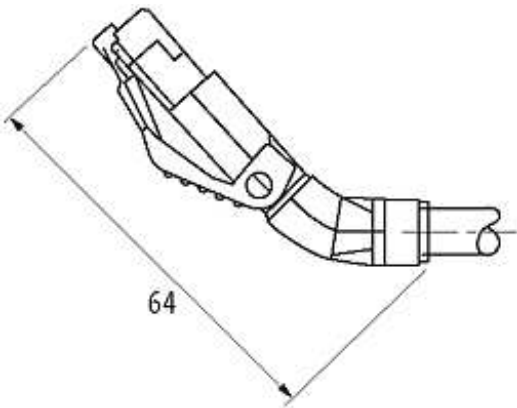

Product may differ from Image

Approvals



More Info



Form

Form 74121

Cables

| | |
|-----------------------|---------------------|
| Cable number | 793 |
| No./diameter of wires | 1 × 4 × AWG22 |
| Wire isolation | PE (wh, ye, bl, or) |
| Torsion | 1 Mio. ± 180°/m |

| | |
|-----------------------------|-----------------------|
| Jacket Color | green |
| Shore hardness outer jacket | 90 ± 5A |
| Material (jacket) | PUR (UL/CSA), Torsion |
| Outer Ø | approx. 6.5 mm |
| Bend radius (fixed) | 8 × outer Ø |
| Bend radius (moving) | 12 × outer Ø |
| Temperature range (fixed) | -40...+80 °C |
| Temperature range (mobile) | -10...+50 °C |
| Shielded | yes |

General data

| | |
|-------------------|--|
| Temperature range | -25...+85 °C, depending on cable quality |
|-------------------|--|

Technical Data

| | |
|-------------------------------|--|
| Operating voltage | 60 V DC |
| Operating current per contact | max. 1.76 A |
| Transfer parameters | CAT5, class D (ISO/IEC 11801:2002), (EN 50173-1) |
| Transfer rate | 10/100 Mbit/s full duplex |
| Locking of ports | Standard |
| Protection | IP20 |
| Material | PUR |

Commercial data

| | |
|------------------------|----------|
| country of origin | DE |
| customs tariff number | 85444210 |
| minimum order quantity | 1 |