

**RJ45 male 45° up, shield with cable, Ethernet**


PUR 2x2xAWG22 shielded vt UL,CSA+dragchain 7,5m

Ethernet CAT 5e

Male RJ45 45° on top


4-pole, shielded

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

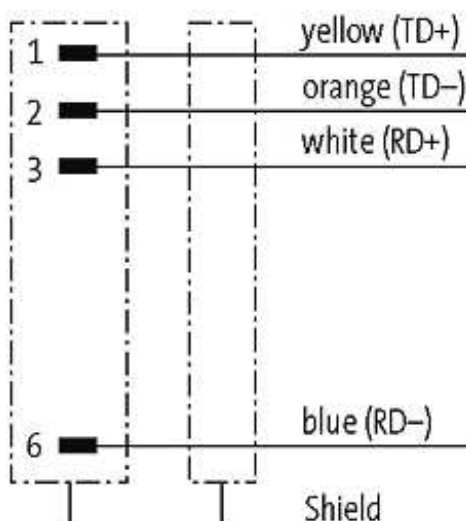**[Link to Product](#)****Illustration**


Male

6 321

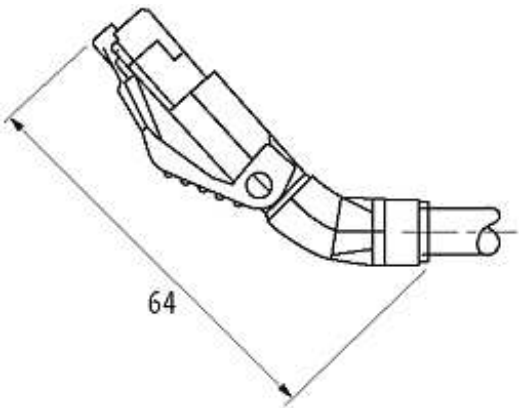

Product may differ from Image

Approvals



More Info



Form

Form 74121

Cables

|                       |                     |
|-----------------------|---------------------|
| Cable number          | 798                 |
| No./diameter of wires | 2 × 2 × AWG22       |
| Wire isolation        | PE (wh, ye, bl, or) |
| C-track properties    | 2 Mio.              |

|                             |                |
|-----------------------------|----------------|
| Jacket Color                | violet         |
| Shore hardness outer jacket | 90 ± 5A        |
| Material (jacket)           | PUR (UL/CSA)   |
| Outer Ø                     | approx. 6.7 mm |
| Bend radius (fixed)         | 5 × outer Ø    |
| Bend radius (moving)        | 15 × outer Ø   |
| Temperature range (fixed)   | -40...+80 °C   |
| Temperature range (mobile)  | -20...+60 °C   |
| Shielded                    | yes            |

#### General data

|                   |  |
|-------------------|--|
| Temperature range | -25...+85 °C, depending on cable quality |
|-------------------|--|

#### Technical Data

|                               |  |
|-------------------------------|--|
| Operating voltage             | 60 V DC  |
| Operating current per contact | max. 1.76 A                                      |
| Transfer parameters           | CAT5, class D (ISO/IEC 11801:2002), (EN 50173-1) |
| Transfer rate                 | 10/100 Mbit/s full duplex                        |
| Locking of ports              | Standard   |
| Protection                    | IP20   |
| Material                      | PUR  |

#### Commercial data

|                        |          |
|------------------------|----------|
| country of origin      | DE       |
| customs tariff number  | 85444210 |
| minimum order quantity | 1        |