

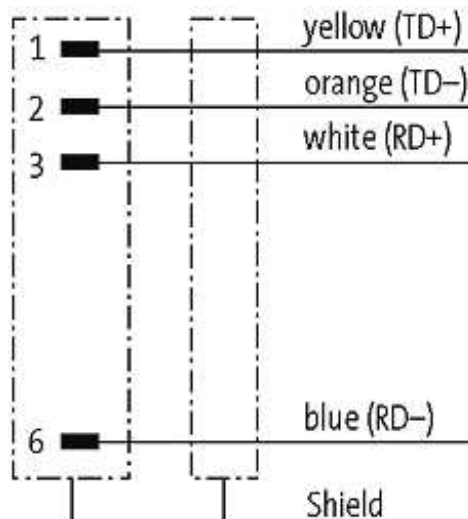
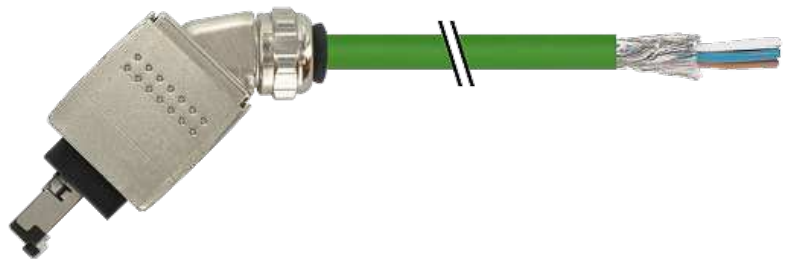
RJ45 Push Pull male 45° with cable Profinet

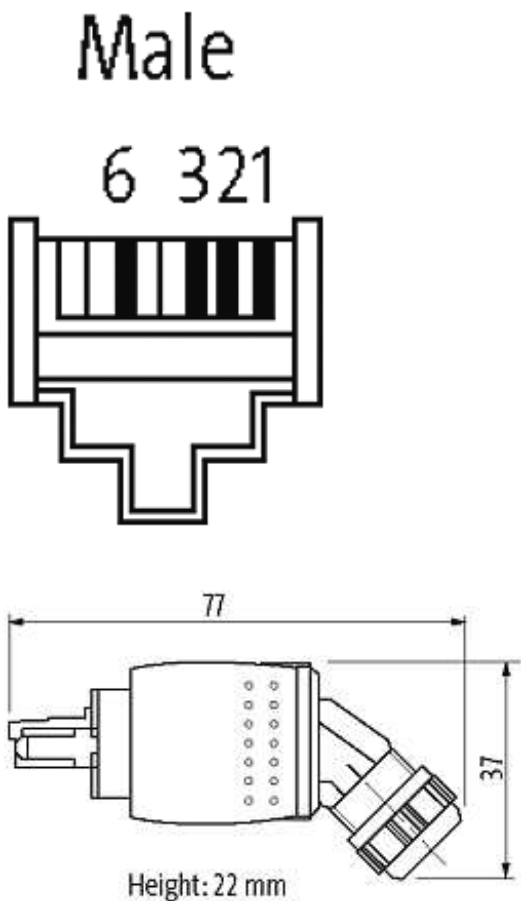
PUR 2x2xAWG22 shielded gn UL/CSA+dragchain 1,5m

Ethernet CAT5

Push Pull RJ45 Data connector

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[**Link to Product**](#)**Illustration**



Product may differ from Image

More Info



Form

Form 74621

Cables

Cable number	796
No./diameter of wires	2 × 2 × AWG22
Wire isolation	PE (wh, ye, bl, or)
C-track properties	2 Mio.
Jacket Color	green
Shore hardness outer jacket	90 ± 5A
Material (jacket)	PUR (UL/CSA)
Outer Ø	approx. 6.7 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	15 × outer Ø
Temperature range (fixed)	-40...+80 °C

Temperature range (mobile)	-20...+60 °C
----------------------------	--------------

Shielded	yes
----------	-----

General data

Temperature range	-25...+85 °C, depending on cable quality
-------------------	--

Technical Data

Operating voltage	60 V DC
-------------------	---------

Operating current per contact	max. 1.76 A
-------------------------------	-------------

Transfer parameters	CAT5, class D (ISO/IEC 11801:2002), (EN 50173-1)
---------------------	--

Transfer rate	to 100 Mbit/s Full Duplex
---------------	---------------------------

Protection	IP65/IP67
------------	-----------

Locking material	Zinc die casting, matte nickel plated
------------------	---------------------------------------

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85444210
-----------------------	----------

minimum order quantity	1
------------------------	---