
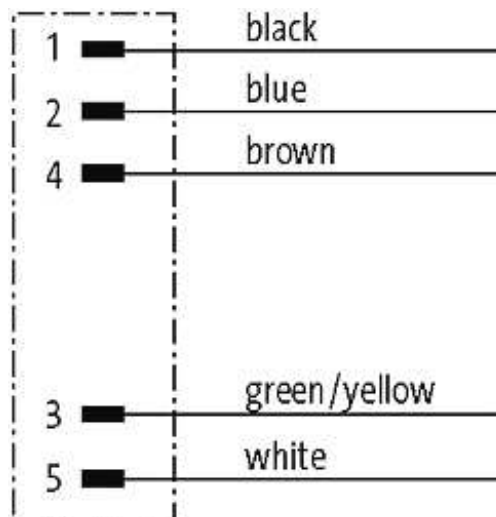


7/8" MALE FLANGE PLUG

Wire 5X0.75 0.2m

Flange 7/8" male
with multi-strand wire
5-pole[Link to Product](#)**Illustration**

Male

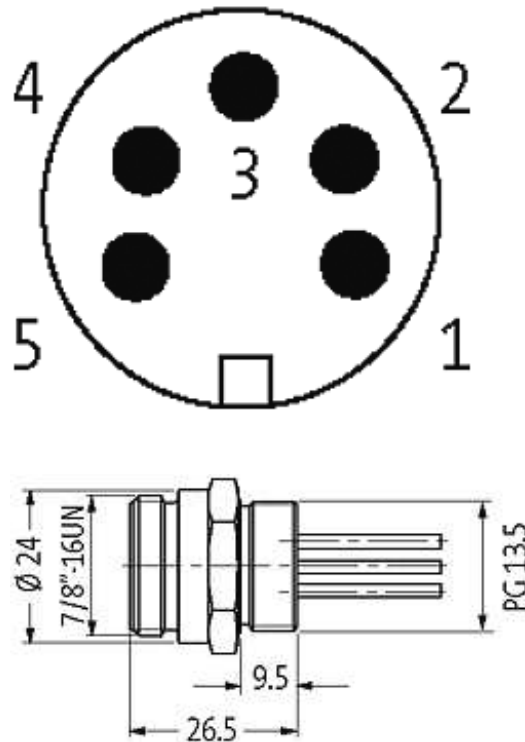

Product may differ from Image

Form

Form	78341
Form	78341
Form	78341

Cables

Cable number	978
Cable number	978
Cable number	978
No./diameter of wires	5 × AWG18
No./diameter of wires	5 × AWG18
No./diameter of wires	5 × AWG18

Wire isolation	PVC (br, wh, bl, bk, gnye)
Wire isolation	PVC (br, wh, bl, bk, gnye)
Wire isolation	PVC (br, wh, bl, bk, gnye)

Shore hardness outer jacket	75 ± 5A
Shore hardness outer jacket	75 ± 5A
Shore hardness outer jacket	75 ± 5A

Material (wire)	UL-Listed
Material (wire)	UL-Listed
Material (wire)	UL-Listed

Outer Ø	approx. 3.1 mm
---------	----------------

Outer Ø	approx. 3.1 mm
Outer Ø	approx. 3.1 mm
Bend radius (fixed)	10 × outer Ø
Bend radius (fixed)	10 × outer Ø
Bend radius (fixed)	10 × outer Ø
Bend radius (moving)	15 × outer Ø
Bend radius (moving)	15 × outer Ø
Bend radius (moving)	15 × outer Ø
Temperature range (fixed)	-25...+85 °C
Temperature range (fixed)	-25...+85 °C
Temperature range (fixed)	-25...+85 °C
Temperature range (mobile)	-10...+50 °C
Temperature range (mobile)	-10...+50 °C
Temperature range (mobile)	-10...+50 °C

General data

Temperature range	-25...+85 °C
Temperature range	-25...+85 °C
Temperature range	-25...+85 °C

Technical Data

Operating voltage	max. 230/400 V AC/DC
Operating voltage	max. 230/400 V AC/DC
Operating voltage	max. 230/400 V AC/DC
Operating current per contact	max. 9 A
Operating current per contact	max. 9 A
Operating current per contact	max. 9 A
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)
Protection	IP67 inserted and tightened (EN 60529)
Protection	IP67 inserted and tightened (EN 60529)
Connection	pre-wired with PVC-wire isolation, (UL/CSA)
Connection	pre-wired with PVC-wire isolation, (UL/CSA)
Connection	pre-wired with PVC-wire isolation, (UL/CSA)

Commercial data

country of origin	DE
country of origin	DE
country of origin	DE
customs tariff number	85444290
customs tariff number	85444290
customs tariff number	85444290

minimum order quantity	1
------------------------	---

minimum order quantity	1
------------------------	---

minimum order quantity	1
------------------------	---