


## 7/8" FEMALE FLANGE PLUG

Wire 5X0.75 0.2m


Flange 7/8" female  
with multi-strand wire  
5-pole

### [Link to Product](#)

#### Illustration

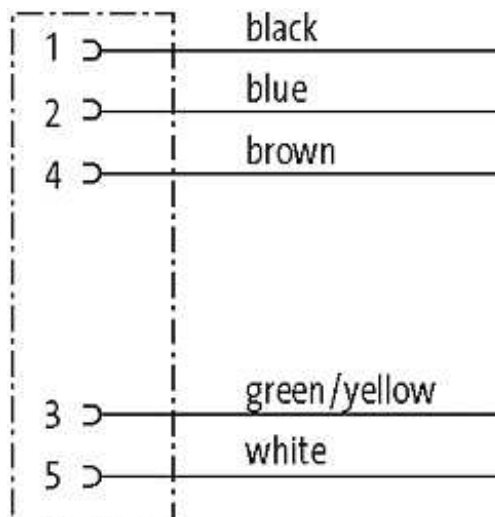

## Female

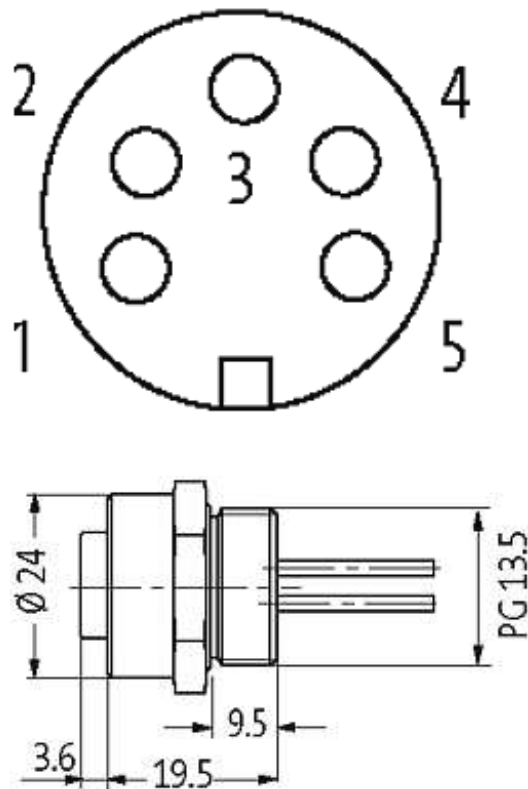

Product may differ from Image

**Form**

Form 78381

**Cables**

Cable number	978
No./diameter of wires	5 × AWG18
Wire isolation	PVC (br, wh, bl, bk, gnye)
Shore hardness outer jacket	75 ± 5A
Material (wire)	UL-Listed
Outer Ø	approx. 3.1 mm
Bend radius (fixed)	10 × outer Ø
Bend radius (moving)	15 × outer Ø
Temperature range (fixed)	-25...+85 °C
Temperature range (mobile)	-10...+50 °C

**General data**

Temperature range -25...+85 °C

**Technical Data**

Operating voltage	max. 230/400 V AC/DC
Operating current per contact	max. 9 A
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing

Protection	IP67 inserted and tightened (EN 60529)
Connection	pre-wired with PVC-wire isolation, (UL/CSA)

**Commercial data**

country of origin	DE
customs tariff number	85444290
minimum order quantity	1