

**PUSH PULL POWER , PROFINET**

PURZ 5x2.5 GRAY, UL/CSA, drag ch 1.2m


Push Pull  
Power cable  
5-pole

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[\*\*Link to Product\*\*](#)**Illustration**

1	black (1)
2	blue (2)
3	brown (3)
4	white (4)
5	green/yellow (PE)



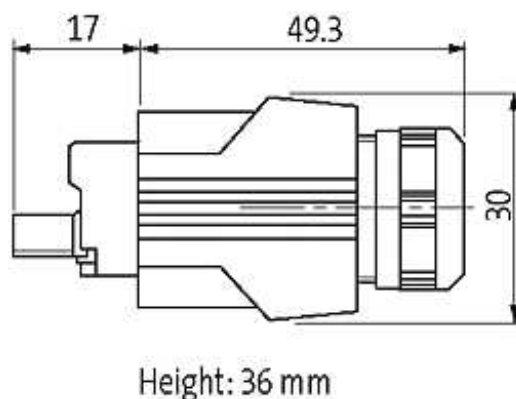

Product may differ from Image

**Form**

Form 99621

**Cables**

Cable number	962
No./diameter of wires	5 × 2.5 mm <sup>2</sup>
Wire isolation	PP (br, wh, bl, bk num, gnye)
C-track properties	5 Mio.
Jacket Color	gray
Shore hardness outer jacket	90 ± 5A
Material (jacket)	PUR (UL/CSA)
Outer Ø	approx. 9.7 mm
Bend radius (fixed)	7.5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-50...+80 °C
Temperature range (mobile)	-20...+80 °C

**General data**

Temperature range -40...+70 °C, depending on cable quality

**Technical Data**

Operating voltage	max. 24 V AC/DC
Operating current per contact (20 °C)	max. 16 A
Locking of ports	Push Pull
Protection	IP67 inserted and tightened (EN 60529)

**Commercial data**

country of origin	CZ
customs tariff number	85444290
minimum order quantity	1